



READY **2** GO

## Industrial Hose Coupled Hose Assemblies



# Table of Contents

Introduction	2
Air / Multipurpose	4
Cleaning Equipment	9
Petroleum	17
Steam	22
Specialty	26
Water-Consumer	29
Welding	32



## **Air / Multipurpose**

From in-plant air, to construction site for pneumatic tools of all sizes and applications, Continental branded Air and Multipurpose hoses are ready to meet the demands of your applications. Available for light to severe duty applications in the sizes you need.



## Pliovic®

Lightweight



A lightweight, economical general purpose hose for carrying air, water and many spray solutions. Pliovic® is suitable for a wide range of industrial, construction and agricultural hand sprayers, and many multipurpose applications. Rated to temperatures of -10°F to 158°F (-23°C to 70°C). Non-conductive, minimum electrical resistance greater than one (1) megohm per inch of hose length at 1000 Volts DC. Available in Pliovic® GS construction or a thick cover, Pliovic® Plus construction.

**Tube**

Black Pliovic®, RMA Class B (Medium Oil Resistance)

**Cover**

Pliovic®, smooth finish, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Spiral synthetic yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Pliovic GS	20146821	Blue	1/4	MXM 1/4 NPT	50	540-350
Pliovic GS	20146822	Blue	1/4	MXM 1/4 NPT	100	540-350
Pliovic GS	20146823	Blue	3/8	MXM 1/4 NPT	50	540-350
Pliovic GS	20146824	Blue	3/8	MXM 1/4 NPT	100	540-350
Pliovic GS	20159171	Red	3/8	MXM 1/4 NPT	50	540-406
Pliovic GS	20345066	Red	3/8	MXM 1/4 NPT	100	540-406
Pliovic GS	20754656	Blue	1/2	MXM 1/2 NPT	50	540-350

## F5™ Air Hose

Lightweight & Flexible



A hybrid thermoplastic hose that provides durability and flexibility, is lightweight and has a low drag resistance. F5™ is non-marking, oil resistant and performs well under cold temperatures to -40°F (-40°C) and temperatures as high as 158°F (70°C). This 300 psi hose is designed for a variety of pneumatic applications in industries such as construction and manufacturing.

**Tube**

Blue Flexible TPE, RMA Class B (Medium Oil Resistance)

**Cover**

Matte Blue Flexible TPE, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Polyester yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
F5	20465485	Blue	1/4	MXM 1/4 NPT	25	540-438
F5	20463349	Blue	1/4	MXM 1/4 NPT	50	540-438
F5	20465487	Blue	1/4	MXM 1/4 NPT	100	540-438
F5	20465479	Blue	3/8	MXM 1/4 NPT	25	540-438
F5	20465480	Blue	3/8	MXM 1/4 NPT	100	540-438
F5	20470808	Blue	3/8	MXM 1/4 NPT	50	540-438
F5	20479683	Blue	3/8	MXM 3/8 NPT	50	540-438
F5	20465473	Blue	1/2	MXM 1/2 NPT	25	540-438
F5	20465474	Blue	1/2	MXM 1/2 NPT	50	540-438
F5	20465475	Blue	1/2	MXM 1/2 NPT	100	540-438

## Frontier®

Good | Most Popular



An economical air and water hose, Frontier® is for a wide range of industrial, construction and agricultural applications. Available in 200, 250, and 300 psi working pressures with a temperature rating of -40°F to 210°F (-40°C to 99°C).

**Tube**

EPDM synthetic rubber, RMA Class C (Limited Oil Resistance)

**Cover**

Black, Red, Yellow, Green or Blue EPDM synthetic rubber

**Reinforcement**

Spiral synthetic yarn, 2" is braided

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
Frontier 200	20129541	Red	1/4	MXM 1/4 NPT	25	569-011
Frontier 200	20132830	Red	1/4	MXM 1/4 NPT	50'	569-011
Frontier 300	20147625	Red	1/4	MXM 1/4 NPT	50	569-557
Frontier 300	20147626	Red	1/4	MXM 1/4 NPT	100	569-557
Frontier 200	20129680	Red	3/8	MXM 1/4 NPT	25	569-011
Frontier 200	20132831	Red	3/8	MXM 1/4 NPT	50	569-011
Frontier 200	20129682	Red	3/8	MXM 1/4 NPT	100	569-011
Frontier 300	20147627	Red	3/8	MXM 1/4 NPT	50	569-557
Frontier 300	20147628	Red	3/8	MXM 1/4 NPT	100	569-557
Frontier 200	20132832	Red	1/2	MXM 1/2 NPT	50	569-011
Frontier 200	20147629	Red	1/2	MXM 1/2 NPT	50	569-557
Frontier 200	20147650	Red	1/2	MXM 1/2 NPT	100	569-557
Frontier 250	20147652	Red	3/4	MXM 3/4 NPT	100	569-012

## Variflex™

Better | High Oil Resistance



A good quality, economical general purpose hose for industrial air service, compressor lines, pneumatic tools, low-pressure spray, and many other applications where the need for oil resistance is moderate. Non-conductive, minimum electrical resistance greater than one (1) megohm per inch of hose length at 1000 volts DC. Available in 200 and 300 psi working pressures, with a temperature rating of -20°F to 210°F (-29°C to 99°C).

**Tube**

Nitrile synthetic rubber, RMA Class A (High Oil Resistance)

**Cover**

Red, Blue or Black Chemivic synthetic rubber, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Spiral synthetic yarn (3/16"- 1½"), braided synthetic yarn (2")

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
Variflex 300	20104919	Red	1/4	MXM 1/4 NPT	50	569-008
Variflex 300	20104942	Red	3/8	MXM 1/4 NPT	50	569-008
Variflex 300	20104909	Red	1/2	MXM 1/2 NPT	50	569-008

## Gorilla®

### Best | Heavy Duty Oil Resistance



A premium quality, multipurpose industrial hose with a wide range of applications in factories, construction, agriculture, quarries, mines, railroads, the oil and gas industry and shipbuilding. All sizes are rated at 500 psi (3.4 MPa) maximum working pressure and have temperature ratings of -20°F to 210°F (-29°C to 99°C). Non-conductive, minimum electrical resistance greater than one (1) megohm per inch of hose length at 1000 Volts DC.

**Tube**

Nitrile synthetic rubber, RMA Class A (High Oil Resistance)

**Cover**

Yellow Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance) MSHA approved

**Reinforcement**

Spiral aramid yarn, 2" is braided synthetic yarn

Product Name	Part #	Hose Color	Hose ID		Packaging	Length		Material #
			in.	ft.		ft.	ft.	
Gorilla	20129563	Yellow	1/4		MXM 1/4 NPT	25		569-035
Gorilla	20132763	Yellow	1/4		MXM 1/4 NPT	50		569-035
Gorilla	20129566	Yellow	3/8		MXM 3/8 NPT	25		569-035
Gorilla	20132764	Yellow	3/8		MXM 3/8 NPT	50		569-035
Gorilla	20129569	Yellow	1/2		MXM 1/2 NPT	25		569-035
Gorilla	20132766	Yellow	1/2		MXM 1/2 NPT	50		569-035
Gorilla	20129582	Yellow	3/4		MXM 3/4 NPT	50		569-035
Gorilla	20129683	Yellow	3/4		UNIVERSAL	50		569-035

## Flexsteel® Service Station Air



For tire inflation service from towers, reels or curb connections. Rated to temperatures of -20°F to 210°F (-29°C to 99°C) for Norfolk and -40°F to 210°F (-40°C to 99°C) for Mt. Pleasant products.

**Tube**

**Norfolk:** Nitrile synthetic rubber, RMA Class B (Medium/High Oil Resistance)

**Mt. Pleasant:** EPDM synthetic rubber, ARPM Class C (Limited Oil Resistance)

**Cover**

**Norfolk:** Red or Black nitrile synthetic rubber, abrasion- and oil-resistant, RMA Class B (Medium/High Oil Resistance)

**Mt. Pleasant:** EPDM synthetic rubber

**Reinforcement**

**Norfolk:** Braided (1) steel wire braid

**Mt. Pleasant:** Spiral synthetic yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length		Material #	
					in.	ft.	Norfolk	Mt. Pleasant
Flexsteel SSA	20023868	Black	1/4	MXM 1/4 NPT	25		539-097	-
Flexsteel SSA	20023869	Black	1/4	MXM 1/4 NPT	50		539-097	-
Flexsteel SSA	20023495	Red	1/4	MXM 1/4 NPT	25		539-078	-
Flexsteel SSA	20023497	Red	1/4	MXM 1/4 NPT	50		539-078	-
Flexsteel SSA	20026059	Red	1/4	MXM 1/4 NPT	25		-	569-018
Flexsteel SSA	20026061	Red	1/4	MXM 1/4 NPT	50		-	569-018
Flexsteel SSA	20023500	Red	3/8	MXM 3/8 NPT	25		539-078	-
Flexsteel SSA	20023502	Red	3/8	MXM 3/8 NPT	50		539-078	-
Flexsteel SSA	20026064	Red	3/8	MXM 3/8 NPT	25		-	569-018
Flexsteel SSA	20026066	Red	3/8	MXM 3/8 NPT	50		-	569-018

## Contractor's Water Hose



Designed for commercial water transfer and wash down applications requiring heavy duty service. Rated to temperatures of -40°F to 210°F (-40°C to 99°C).

### Tube

EPDM

### Cover

Black EPDM

### Reinforcement

Spiral synthetic yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Contractor's Water Hose	20243769	Black	5/8	MF GHT	50	569-080
Contractor's Water Hose	20243770	Black	3/4	MF GHT	50	569-080

## Jackhammer



An economical EPDM air hose available as factory-made assemblies with high-quality crimped universal couplings for jackhammer and other uses on construction sites. Available in 3/4" and 1" red cover at 200 and 300 psi.

### Tube

EPDM synthetic rubber RMA Class C (Limited Oil Resistance)

### Cover

Red or Yellow EPDM synthetic rubber

### Reinforcement

4-Spiral textile layer construction

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Econ. Jackhammer/EPDM 200	20665550	Red	3/4	Universal Coupling Crimped	50	569-086
Econ. Jackhammer/EPDM 300	20665753	Red	3/4	Universal Coupling Crimped	50	569-096
Econ. Jackhammer/EPDM 300	20665756	Red	3/4	Universal Coupling Crimped	50	569-059
Econ. Jackhammer/EPDM 200	20415002	Red	1	Universal Coupling Crimped	50	569-086



## Aquahammer® with Retro-Fit Kit



Continental Aquahammer® Dual Air/Water Hose makes a clean sweep when it comes to suppressing hazardous conditions on the jobsite. Its twin-lined design uses a wet suppression system to keep dangerous silica dust particles out of the air when hammering through concrete.

SAP Number	Color	ID		OD		MAX WP		Assembly Weight	
		in	mm	in	mm	psi	MPa	lb/ft	kg/m
21011268	Blue	3/8	9.6	0.657	16.7	200	1.38	0.538	0.785
	Green	3/4	19.1	1.13	28.8	200	1.38		

**Tube**

Black EPDM, ARPM Class C (Limited Oil Resistance)

**Cover**

Black EPDM, ARPM Class C (Limited Oil Resistance)

**Reinforcement**

Spiral Synthetic Yarn

## Aquahammer® Silica Dust Water Spray Retro-Fit Kit

Continental's Retro-Fit Kit extends the water supply down the side of the jackhammer for more accurate and efficient suppression of silica dust.

**THE KIT CONTAINS**

PART NUMBER: 21054808

- > 1 Y-hose
- > 1 Extension hose
- > 1 Shutoff valve
- > 1 Clamp
- > 4 Zip ties
- > 2 Nozzle tips



**AQUAHAMMER® BUNDLE KITS ARE AVAILABLE**

PART NUMBER: 21067676

This kit combines our Aquahammer® dual air/water hose with the Aquahammer® retro-fit kit for even greater suppression of environmental hazards.

## Cleaning Equipment

When it comes to cleaning equipment, having the right hose can make all the difference. Continental pressure washer and cleaning hoses are available in 1/4" up to 1/2" diameter and pressures ranging from 1500 up to 6000 psi in the hose lengths you need to get the job done on your schedule.



## Neptune™ 1500

1500 psi WP



For pressure washer equipment, agricultural sprayers and high-pressure air lines.  
Rated to temperatures of -20°F to 210°F (-29°C to 99°C)

**Tube**

Nitrile synthetic rubber

**Cover**

Blue, Gray, Yellow or Black oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Braided (1) synthetic yarn up through 1/2"

Braided (2) synthetic yarn for 3/4"

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
					in.	ft.
Neptune 1500	20023118	Black	1/4	MXMS	25	536-388
Neptune 1500	20023123	Black	3/8	MXMS w/ Kink Guards	50	536-388
Neptune 1500	20023125	Black	3/8	MXMS w/ Kink Guards	100	536-388
Neptune 1500	20070397	Gray	3/8	MXMS w/ Kink Guards	75	536-387
Neptune 1500	20226540	Gray	3/8	MXMS w/ Kink Guards	50	536-387
Neptune 1500	20226489	Gray	3/8	MXMS w/ Kink Guards	100	536-387

## Neptune™ 3000

3000 psi WP



For use on pressure washer machines with working pressures up to 3000 psi.  
Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Black, Blue, Yellow or Gray oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Braided (1) steel wire

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
					in.	ft.
Neptune 3000	20023678	Blue	1/4	MXMS w/ Kink Guards	25	539-089
Neptune 3000	20023680	Blue	1/4	MXMS w/ Kink Guards	50	539-089
Neptune 3000	20023732	Gray	1/4	MXMS w/ Kink Guards	25	539-090
Neptune 3000	20023733	Gray	1/4	MXMS w/ Kink Guards	50	539-090
Neptune 3000	20023734	Gray	1/4	MXMS w/ Kink Guards	100	539-090
Neptune 3000	20023553	Black	3/8	MXMS w/ Kink Guards	25	539-085
Neptune 3000	20023570	Black	3/8	MXMS w/ Kink Guards	50	539-085
Neptune 3000	20023573	Black	3/8	MXMS w/ Kink Guards	75	539-085
Neptune 3000	20023581	Black	3/8	MXMS w/ Kink Guards	100	539-085
Neptune 3000	20023694	Blue	3/8	MXMS w/ Kink Guards	25	539-089
Neptune 3000	20023695	Blue	3/8	MXMS w/ Kink Guards	30	539-089
Neptune 3000	20023696	Blue	3/8	MXMS w/ Kink Guards	40	539-089
Neptune 3000	20023699	Blue	3/8	MXMS w/ Kink Guards	50	539-089
Neptune 3000	20023703	Blue	3/8	MXMS w/ Kink Guards	75	539-089
Neptune 3000	20023705	Blue	3/8	MXMS w/ Kink Guards	100	539-089
Neptune 3000	20140094	Gray	3/8	MXMS w/ Kink Guards	40	539-090
Neptune 3000	20023740	Gray	3/8	MXMS w/ Kink Guards	50	539-090
Neptune 3000	20116289	Gray	3/8	MXMS w/ Kink Guards	75	539-090
Neptune 3000	20112264	Gray	3/8	MXMS w/ Kink Guards	100	539-090
Neptune 3000	20023960	Yellow	3/8	MXMS w/ Kink Guards	50	539-104
Neptune 3000	20023961	Yellow	3/8	MXMS w/ Kink Guards	75	539-104
Neptune 3000	20023962	Yellow	3/8	MXMS w/ Kink Guards	100	539-104

Continued on next page

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Neptune 3000	20023611	Black	1/2	MXMS w/ Kink Guards	50	539-085
Neptune 3000	20023613	Black	1/2	MXMS w/ Kink Guards	100	539-085
Neptune 3000	20023717	Blue	1/2	MXMS w/ Kink Guards	50	539-089
Neptune 3000	20031720	Blue	1/2	MXMS w/ Kink Guards	100	539-089

## Neptune™ 4001-R

4000 psi WP



For high-pressure washer equipment with working pressures up to 4000 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Blue, Gray, Yellow or Black oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Braided (1) steel wire

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Neptune 4001-R	20141700	Black	3/8	MXMS w/ Kink Guards	25	539-261
Neptune 4001-R	20119464	Black	3/8	MXMS w/ Kink Guards	50	539-261
Neptune 4001-R	20141702	Black	3/8	MXMS w/ Kink Guards	75	539-261
Neptune 4001-R	20129270	Black	3/8	MXMS w/ Kink Guards	100	539-261
Neptune 4001-R	20119465	Blue	3/8	MXMS w/ Kink Guards	50	539-265
Neptune 4001-R	20255375	Blue	3/8	MXMS w/ Kink Guards	100	539-265
Neptune 4001-R	20348154	Blue	3/8	MXMS w/ Kink Guards	25	539-265
Neptune 4001-R	20135601	Yellow	3/8	MXMS w/ Kink Guards	50	539-266
Neptune 4001-R	20116310	Gray	3/8	MXMS w/ Kink Guards	50	539-262
Neptune 4001-R	20132878	Gray	3/8	MXMS w/ Kink Guards	100	539-262
Neptune 4001-R	20814134	Yellow	3/8	MXMS w/ Kink Guards	25	539-266
Neptune 4001-R	20139406	Yellow	3/8	MXMS w/ Kink Guards	100	539-266

## Neptune™ 4500

4500 psi WP



For use on pressure washer machines with working pressures up to 4500 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Blue, Yellow or Black oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Braided (2) steel wires

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Neptune 4500	20455567	Black	3/8	MXMS w/ Kink Guards	25	539-091
Neptune 4500	20023775	Black	3/8	MXMS w/ Kink Guards	50	539-091
Neptune 4500	20023778	Black	3/8	MXMS w/ Kink Guards	75	539-091
Neptune 4500	20023785	Black	3/8	MXMS w/ Kink Guards	100	539-091
Neptune 4500	20024007	Blue	3/8	MXMS w/ Kink Guards	50	539-124
Neptune 4500	20142226	Blue	3/8	MXMS w/ Kink Guards	75	539-124
Neptune 4500	20046210	Blue	3/8	MXMS w/ Kink Guards	100	539-124

Continued on next page

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Neptune 4500	20023796	Black	1/2	MXMS w/ Kink Guards	50	539-091
Neptune 4500	20023799	Black	1/2	MXMS w/ Kink Guards	100	539-091

## Neptune™ 6000

6000 psi WP



For use on pressure washer machines with working pressures up to 6000 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Black oil-resistant synthetic rubber  
RMA Class B (Medium Oil Resistance)

**Reinforcement**

Braided (2) steel wires

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Neptune 6000	20130010	Black	3/8	MXMS w/ Kink Guards	50	539-149
Neptune 6000	20777492	Black	3/8	MSXMS w/ Kink Guards	75	539-149
Neptune 6000	20133521	Black	3/8	MXMS w/ Kink Guards	100	539-149
Neptune 6000	20160578	Black	3/8	MXMS w/ Kink Guards	150	539-149

## Gauntlet® 1500

High Abrasion & Oil Resistance



Gauntlet® 1500 is for pressure washer equipment with working pressures up to 1500 psi. Its super abrasion-resistant cover provides maximum protection against adverse effects of oil and animal fats. Rated to temperatures of -20°F to 210°F (-29°F to 99°C)

**Tube**

Nitrile synthetic rubber

**Cover**

Black or Yellow oil-resistant Carbryn™ synthetic rubber, ARPM Class A (High Oil Resistance)

**Reinforcement**

Braided (1) synthetic yarn up through 1/2"  
Braided (2) synthetic yarn for 3/4"

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Gauntlet 1500	20023335	Yellow	3/8	MXMS w/ Kink Guards	50	536-474
Gauntlet 1500	20023336	Yellow	3/8	MXMS w/ Kink Guards	75	536-474
Gauntlet 1500	20023337	Yellow	3/8	MXMS w/ Kink Guards	100	536-474
Gauntlet 1500	20477485	Yellow	3/8	MXMS w/ Kink Guards	25	536-474
Gauntlet 1500	20119932	Yellow	1/2	MXMS w/ Kink Guards	100	536-474
Gauntlet 1500	20119931	Yellow	1/2	MXMS w/ Kink Guards	75	536-474
Gauntlet 1500	20119930	Yellow	1/2	MXMS w/ Kink Guards	50	536-474

## Gauntlet® 3000

### High Abrasion & Oil Resistance



For use on pressure washer machines with working pressures up to 3000 psi. Its super abrasion-resistant cover provides maximum protection against adverse effects of oil and animal fats. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Wrapped finish Black or Yellow oil-resistant Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance)

**Reinforcement**

Braided (2) steel wires

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Gauntlet 3000	20023881	Black	3/8	MXMS w/ Kink Guards	25	539-099
Gauntlet 3000	20023885	Black	3/8	MXMS w/ Kink Guards	50	539-099
Gauntlet 3000	20023886	Black	3/8	MXMS w/ Kink Guards	75	539-099
Gauntlet 3000	20023887	Black	3/8	MXMS w/ Kink Guards	100	539-099
Gauntlet 3000	20023896	Yellow	3/8	MXMS w/ Kink Guards	25	539-100
Gauntlet 3000	20023899	Yellow	3/8	MXMS w/ Kink Guards	50	539-100
Gauntlet 3000	20023900	Yellow	3/8	MXMS w/ Kink Guards	75	539-100
Gauntlet 3000	20023901	Yellow	3/8	MXMS w/ Kink Guards	100	539-100
Gauntlet 3000	20023888	Black	1/2	MXMS w/ Kink Guards	50	539-099
Gauntlet 3000	20023889	Black	1/2	MXMS w/ Kink Guards	100	539-099
Gauntlet 3000	20023904	Yellow	1/2	MXMS w/ Kink Guards	50	539-100
Gauntlet 3000	20023905	Yellow	1/2	MXMS w/ Kink Guards	100	539-100
Gauntlet 3000	20215606	Yellow	1/2	MXMS w/ Kink Guards	25	539-100
Gauntlet 3000	20119588	Yellow	1/2	MXMS w/ Kink Guards	75	539-100

## Gauntlet® 4500

### High Abrasion & Oil Resistance



For use on pressure washer machines with working pressures up to 4500 psi. Its super abrasion-resistant cover provides maximum protection against adverse effects of oil and animal fats. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Black or Yellow oil-resistant Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance)

**Reinforcement**

Braided (2) steel wires

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Gauntlet 4500	20220625	Black	3/8	MXMS w/ Kink Guards	100	539-122
Gauntlet 4500	20220657	Black	3/8	MXMS w/ Kink Guards	50	539-122
Gauntlet 4500	20220658	Black	3/8	MXMS w/ Kink Guards	75	539-122
Gauntlet 4500	20024002	Yellow	3/8	MXMS w/ Kink Guards	50	539-120
Gauntlet 4500	20161272	Yellow	3/8	MXMS w/ Kink Guards	100	539-120
Gauntlet 4500	20048788	Black	1/2	MXMS w/ Kink Guards	50	539-122

## Galvanator® 3000

Rust-Resistant Wire | Severe Duty



For pressure washer equipment. Its rust-resistant reinforcement and superior abrasion-resistant cover provide maximum protection against adverse effects of water, oil and animal fats. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Wrapped finish Black or Yellow oil-resistant Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance)

**Reinforcement**

Braided (2) steel wires

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.			
Galvanator 3000	20024111	Black	3/8	MXMS w/ Kink Guards	25	539-201
Galvanator 3000	20024114	Black	3/8	MXMS w/ Kink Guards	50	539-201
Galvanator 3000	20024115	Black	3/8	MXMS w/ Kink Guards	75	539-201
Galvanator 3000	20024116	Black	3/8	MXMS w/ Kink Guards	100	539-201
Galvanator 3000	20024101	Yellow	3/8	MXMS w/ Kink Guards	25	539-200
Galvanator 3000	20024104	Yellow	3/8	MXMS w/ Kink Guards	50	539-200
Galvanator 3000	20024105	Yellow	3/8	MXMS w/ Kink Guards	75	539-200
Galvanator 3000	20024106	Yellow	3/8	MXMS w/ Kink Guards	100	539-200
Galvanator 3000	20024117	Black	1/2	MXMS w/ Kink Guards	50	539-201
Galvanator 3000	20024118	Black	1/2	MXMS w/ Kink Guards	100	539-201
Galvanator 3000	20024107	Yellow	1/2	MXMS w/ Kink Guards	50	539-200
Galvanator 3000	20024108	Yellow	1/2	MXMS w/ Kink Guards	100	539-200

## Spiraflo®

Prevents Water Damming



Designed specifically for the pressure washer industry. A pressure washer hose that reduces damming, which can cause clean spots. Ideal for surface cleaning applications, such as parking decks and lots; beef, dairy and poultry operations; gas stations, garages and auto mechanic shops. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Black nitrile synthetic rubber

**Cover**

Grooved blue oil resistant synthetic rubber, ARPM Class B (Medium/High Oil Resistance)

**Reinforcement**

Braided (1) steel wire

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.			
Spiraflo	20345774	Blue	3/8	MXMS w/ Kink Guards	100	539-186
Spiraflo	20345778	Blue	3/8	MXMS w/ Kink Guards	50	539-186

## Whitewater®



For use on either steam cleaner machines or combination steam cleaner/pressure washer machines. Handles hot water at 325°F (163°C) and 350 psi for steam cleaning service, handles hot water at 250°F (121°C) and 3000 psi (2500 psi on 1/2") for pressure washer service.

**Tube**

Pyrosyn® synthetic rubber

**Cover**

Black and Red Chlorosulfonated Polyethylene synthetic rubber, RMA Class B (Medium Oil Resistance)

**Reinforcement**

Braided (1) steel wire

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Whitewater	20023830	Black	3/8	MXM w/ Kink Guards	25	539-095
Whitewater	20023834	Black	3/8	MXM w/ Kink Guards	50	539-095
Whitewater	20023837	Black	3/8	MXM w/ Kink Guards	75	539-095
Whitewater	20023838	Black	3/8	MXM w/ Kink Guards	100	539-095
Whitewater	20023989	Red	3/8	MXM w/ Kink Guards	50	539-110
Whitewater	20133285	Red	3/8	MXM w/ Kink Guards	100	539-110
Whitewater	20023842	Black	1/2	MXM w/ Kink Guards	50	539-095
Whitewater	20023844	Black	1/2	MXM w/ Kink Guards	100	539-095
Whitewater	20174258	Red	1/2	MXM	100	539-110
Whitewater	20208850	Red	1/2	MXM	50	539-110

## Fortress® 1000

### Microban® Antimicrobial



For use on pressure washer machines with working pressures up to 1000 psi. Applications include washdown service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion- and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of our Fortress® washdown hose incorporates Microban® antimicrobial built-in product protection. Rated to temperatures of -20°F to 210°F (-29°C to 99°C).

**Tube**

Nitrile synthetic rubber

**Cover**

Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance) with Microban® product protection

**Reinforcement**

Braided (1) synthetic yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Fortress 1000	20221285	Yellow	3/8	MXMS w/ Kink Guards	50	536-575
Fortress 1000	20171832	Yellow	3/8	MXMS w/ Kink Guards	100	536-575
Fortress 1000	20295388	Yellow	3/8	MXMS w/ Kink Guards	75	536-575



# Yellow Fortress® 3000

Microban® Antimicrobial



A high-quality construction for use in hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion- and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of our Yellow Fortress® 3000 hose incorporates Microban® antimicrobial built-in product protection. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

**Tube**

Black Nitrile

**Cover**

Yellow Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance) with Microban® product protection

**Reinforcement**


Braided (1) steel wire

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Fortress 3000	20139341	Yellow	3/8	MXMS w/ Kink Guards	50	539-400
Fortress 3000	20139702	Yellow	3/8	MXMS w/ Kink Guards	100	539-400
Fortress 3000	20287106	Yellow	3/8	MXMS w/ Kink Guards	25	539-400
Fortress 3000	20318435	Yellow	3/8	MXMS w/ Kink Guards	75	539-400
Fortress 3000	20784116	Yellow	1/2	MSXMS w/ Kink Guards	50	539-400



# Petroleum

Whether your application needs are for DEF (Diesel Exhaust Fluid), Aggie Gas, LPG or Fuel Oil Delivery, Continental has your petroleum applications covered, in stock and Ready 2 Go.

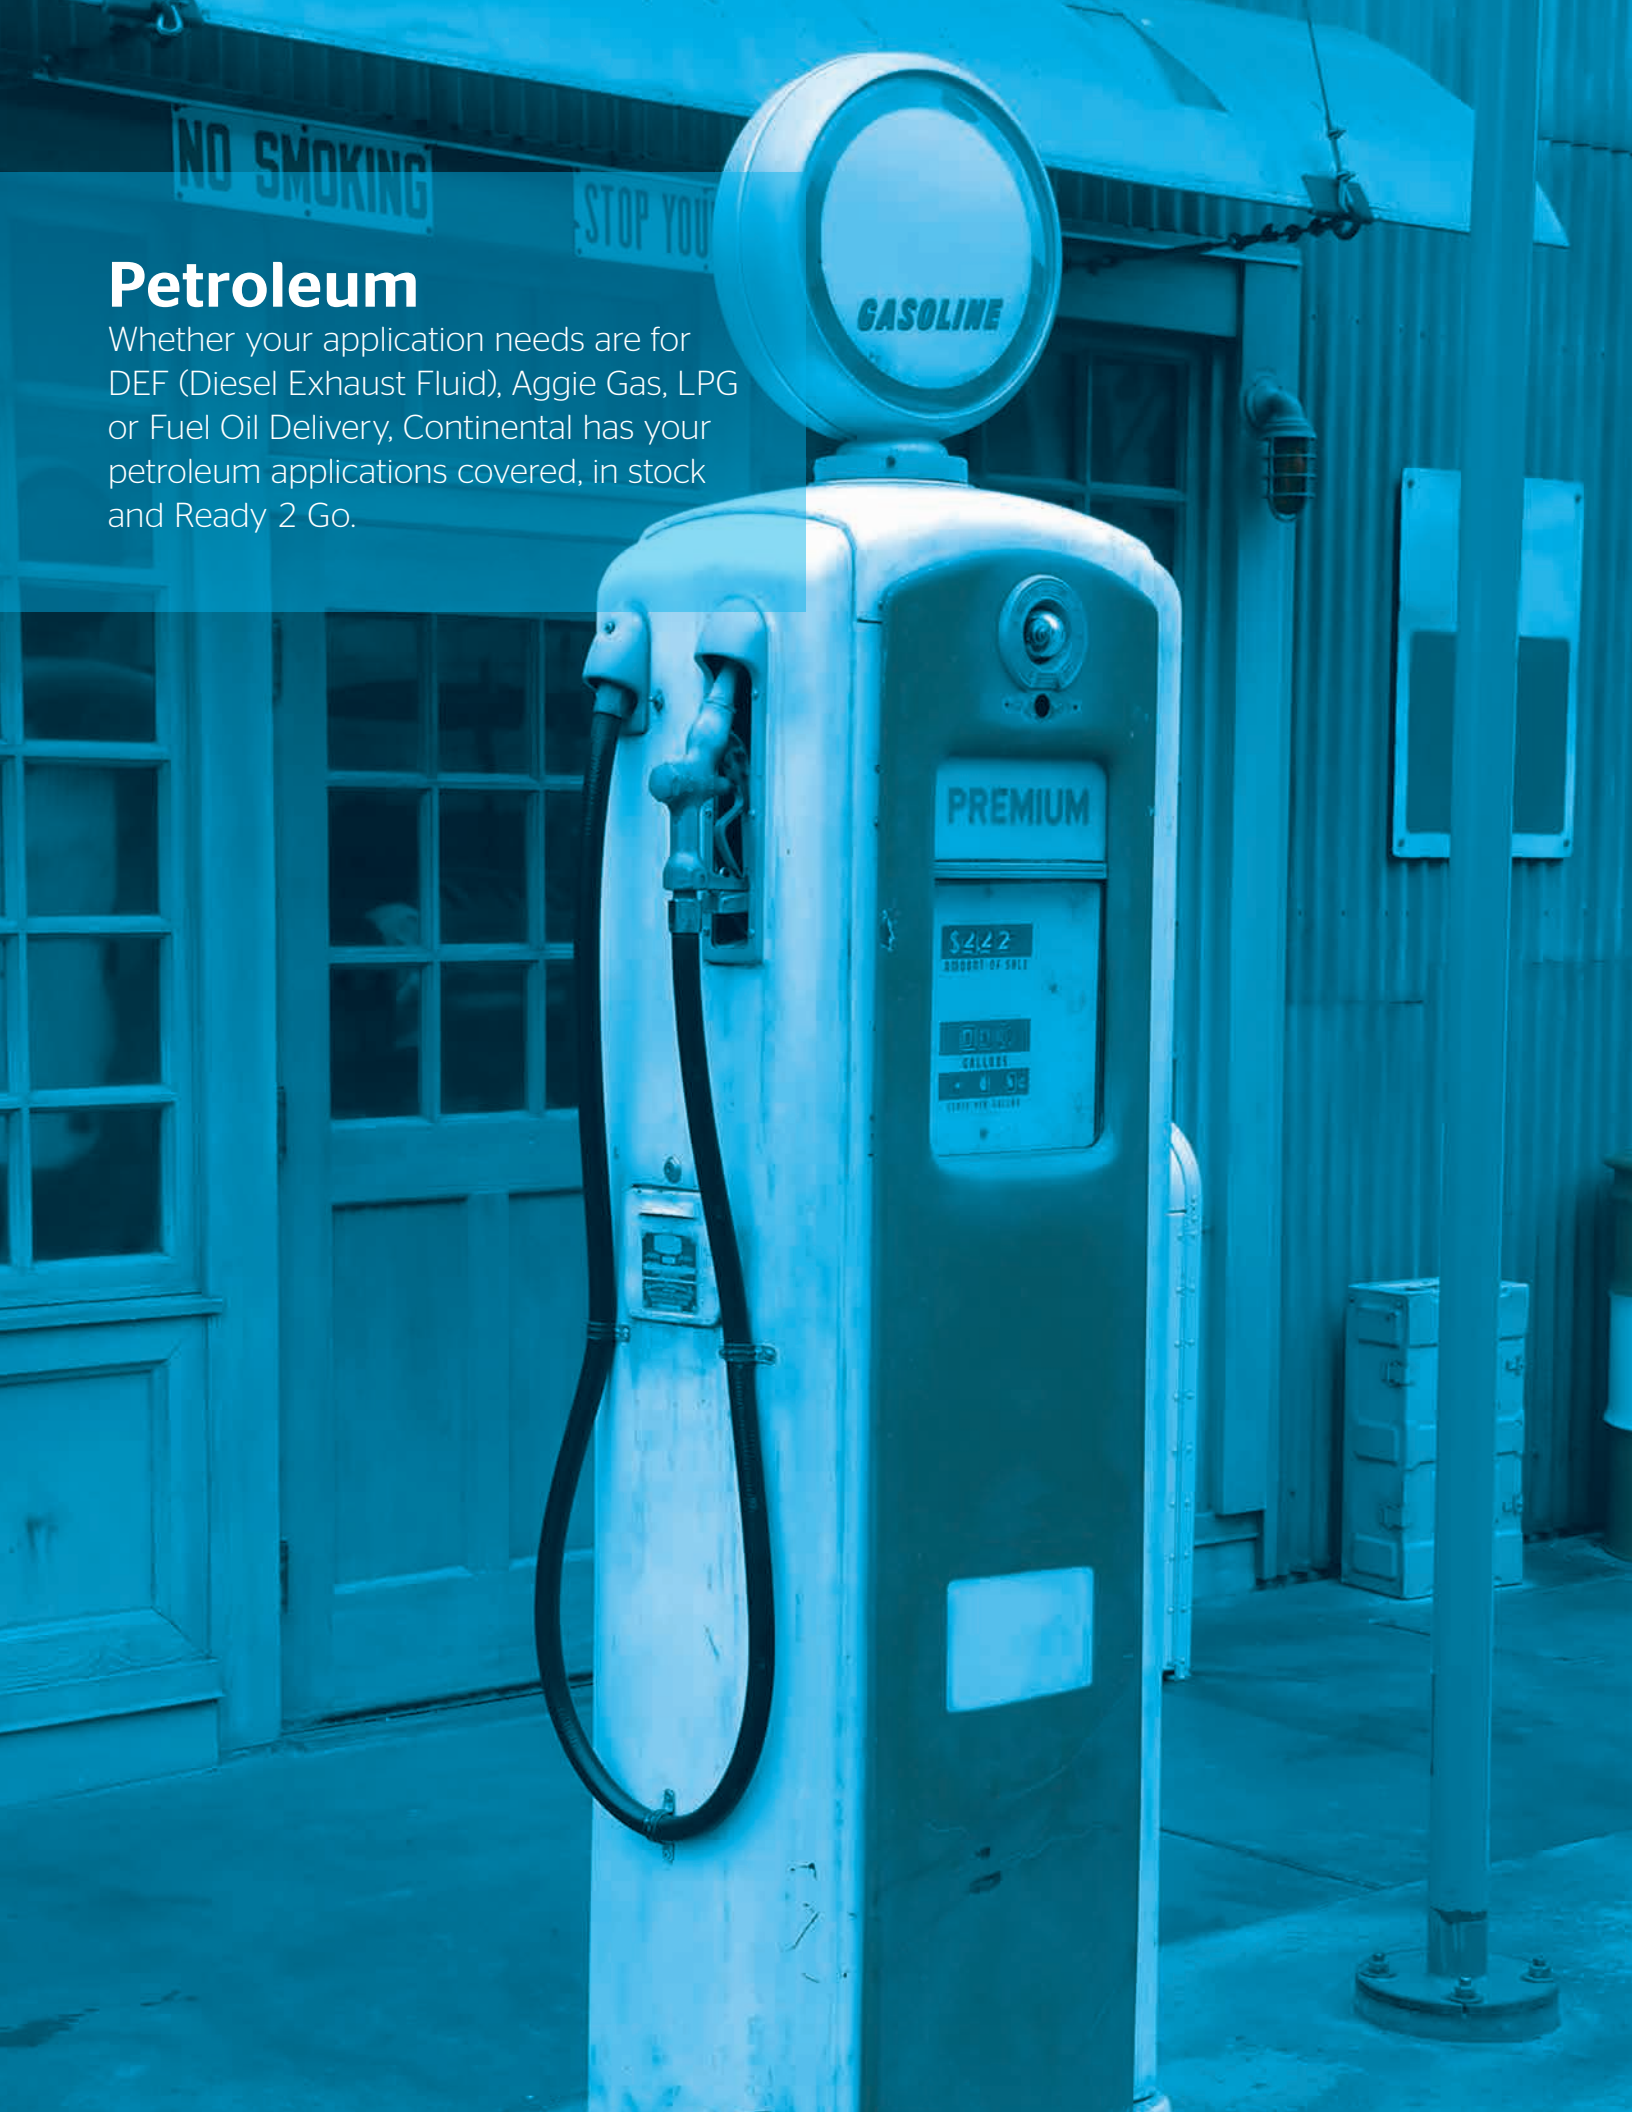

## Aggie Gas™



A multi-use type hose for dispensing gasoline, grease, kerosene and petroleum oils from farm and barrel type pumps. It is for agricultural, construction and industrial service where UL approval is not required. Rated to temperatures of -30°F to 140°F (-34°C to 60°C).

**Tube**

Nitrile synthetic rubber (ORS)

**Cover**

Black or red Chemivic® synthetic rubber (ORS)

**Reinforcement**

Spiral synthetic yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.			
Aggie Gas w/ Static Wire	20028740	Black	3/4	ST X ST 3/4" NPT	8	595-001
Aggie Gas w/ Static Wire	20028742	Black	3/4	ST X ST 3/4" NPT	10	595-001
Aggie Gas w/ Static Wire	20028744	Black	3/4	ST X ST 3/4" NPT	12	595-001
Aggie Gas w/ Static Wire	20028746	Black	3/4	ST X ST 3/4" NPT	14	595-001
Aggie Gas w/ Static Wire	20352464	Black	3/4	ST X ST 3/4" NPT	8	595-028
Aggie Gas w/ Static Wire	20352465	Black	3/4	ST X ST 3/4" NPT	10	595-028
Aggie Gas w/ Static Wire	20352504	Black	3/4	ST X ST 3/4" NPT	12	595-028
Aggie Gas w/ Static Wire	20352507	Black	3/4	ST X ST 3/4" NPT	14	595-028
Aggie Gas w/ Static Wire	20028755	Black	1	ST X ST 1" NPT	8	595-001
Aggie Gas w/ Static Wire	20028757	Black	1	ST X ST 1" NPT	10	595-001
Aggie Gas w/ Static Wire	20028759	Black	1	ST X ST 1" NPT	12	595-001
Aggie Gas w/ Static Wire	20028761	Black	1	ST X ST 1" NPT	14	595-001
Aggie Gas w/ Static Wire	20352551	Black	1	ST X ST 1" NPT	8	595-028
Aggie Gas w/ Static Wire	20352552	Black	1	ST X ST 1" NPT	10	595-028
Aggie Gas w/ Static Wire	20352535	Black	1	ST X ST 1" NPT	12	595-028

## DEF Dispensing Hose



Diesel Exhaust Fluid (DEF: aqueous 32.5% nitrogen solution of high-purity urea in deionized water) is a key component of selective catalytic reduction (SCR) systems, which help diesel vehicles meet stringent emission regulations effective January 1, 2010. DEF is a liquid reducing agent that reacts with engine exhaust in the presence of a catalyst to convert smog-forming nitrogen oxides (NOx) into harmless nitrogen and water vapor. Continental DEF Dispensing Hose is specifically designed to convey the high-purity, aqueous urea solution. DEF hose tube compound is specially formulated with low extraction EPDM and peroxide cured to provide superior extraction levels to significantly reduce contamination. Flexible softwall construction provides superior handling in standard dispensing and reeling applications. Static wire available for installation in Class I, Division 1 areas. Rated to temperatures of -40°F to 140°F (-40°C to 60°C).

**Tube**

Specially formulated low-extraction EPDM, peroxide cured

**Cover**

Specially formulated low-extraction EPDM

**Reinforcement**

Polyester braid

Product Name	Part #	Hose Color	Hose ID	Packaging	Material #
			in.		
DEF	Call	Black	3/4	Stainless Steel Male NPT	532-027
DEF	Call	Black	3/4	Stainless Steel Male BSPP UST Fittings	532-027
DEF	Call	Black	3/4	1" Stainless Steel Male BSPP UST Fittings	532-027

## Redwing® Fuel Oil



Redwing® Fuel Oil is for transfer and delivery of fuel oil and petroleum products for home delivery, commercial and industrial service. Redwing® Fuel Oil has two textile braids. The braided construction reduces kinking and twisting when reeling. The smooth cover has low drag resistance. Rated to temperatures of -40°F to 140°F (-40°C to 60°C).

- Tube**  
Nitrile synthetic rubber (ORS)
- Cover**  
Red Chemivic® synthetic rubber (smooth finish) (ORS)
- Reinforcement**  
Braided (2) synthetic yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length		Material #
					in.	ft.	
Redwing Fuel Oil	20021791	Red	1	MXF	75		532-016
Redwing Fuel Oil	20021792	Red	1	MXF	100		532-016
Redwing Fuel Oil	20021793	Red	1	MXF	125		532-016
Redwing Fuel Oil	20021794	Red	1	MXF	150		532-016
Redwing Fuel Oil	20021795	Red	1	MXF	175		532-016
Redwing Fuel Oil	20021796	Red	1	MXF	200		532-016
Redwing Fuel Oil	20021749	Red	1	MXM	50		532-016
Redwing Fuel Oil	20021750	Red	1	MXM	100		532-016
Redwing Fuel Oil	20021751	Red	1	MXM	125		532-016
Redwing Fuel Oil	20021752	Red	1	MXM	150		532-016
Redwing Fuel Oil	20021753	Red	1	MXM	175		532-016
Redwing Fuel Oil	20029437	Red	1	MXM	200		532-016
Redwing Fuel Oil	20021781	Red	1¼	FXF	75		532-016
Redwing Fuel Oil	20054447	Red	1¼	FXF	100		532-016
Redwing Fuel Oil	20021782	Red	1¼	FXF	125		532-016
Redwing Fuel Oil	20029982	Red	1¼	FXF	135		532-016
Redwing Fuel Oil	20021783	Red	1¼	FXF	150		532-016
Redwing Fuel Oil	20021784	Red	1¼	FXF	175		532-016
Redwing Fuel Oil	20021785	Red	1¼	FXF	200		532-016
Redwing Fuel Oil	20021799	Red	1¼	MXF	75		532-016
Redwing Fuel Oil	20021800	Red	1¼	MXF	100		532-016
Redwing Fuel Oil	20021801	Red	1¼	MXF	125		532-016
Redwing Fuel Oil	20021802	Red	1¼	MXF	150		532-016
Redwing Fuel Oil	20021803	Red	1¼	MXF	175		532-016
Redwing Fuel Oil	20021804	Red	1¼	MXF	200		532-016
Redwing Fuel Oil	20021756	Red	1¼	MXM	75		532-016
Redwing Fuel Oil	20021757	Red	1¼	MXM	100		532-016
Redwing Fuel Oil	20021758	Red	1¼	MXM	125		532-016
Redwing Fuel Oil	20021759	Red	1¼	MXM	150		532-016
Redwing Fuel Oil	20021760	Red	1¼	MXM	175		532-016

Continued on next page

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Redwing Fuel Oil	20021761	Red	1¼	MXM	200	532-016
Redwing Fuel Oil	20114832	Red	1¾	FXF	100	532-016
Redwing Fuel Oil	20021786	Red	1¾	FXF	125	532-016
Redwing Fuel Oil	20021787	Red	1¾	FXF	150	532-016
Redwing Fuel Oil	20021788	Red	1¾	FXF	175	532-016
Redwing Fuel Oil	20021789	Red	1¾	FXF	200	532-016
Redwing Fuel Oil	20021806	Red	1¾	MXF	75	532-016
Redwing Fuel Oil	20021807	Red	1¾	MXF	100	532-016
Redwing Fuel Oil	20021808	Red	1¾	MXF	125	532-016
Redwing Fuel Oil	20021810	Red	1¾	MXF	150	532-016
Redwing Fuel Oil	20021811	Red	1¾	MXF	175	532-016
Redwing Fuel Oil	20021812	Red	1¾	MXF	200	532-016
Redwing Fuel Oil	20046181	Red	1¾	MXM	75	532-016
Redwing Fuel Oil	20021765	Red	1¾	MXM	100	532-016
Redwing Fuel Oil	20021767	Red	1¾	MXM	125	532-016
Redwing Fuel Oil	20021768	Red	1¾	MXM	150	532-016
Redwing Fuel Oil	20021769	Red	1¾	MXM	175	532-016
Redwing Fuel Oil	20021770	Red	1¾	MXM	200	532-016
Redwing Fuel Oil	20021790	Red	1½	FXF	100	532-016
Redwing Fuel Oil	20118052	Red	1½	FXF	125	532-016
Redwing Fuel Oil	20032330	Red	1½	FXF	150	532-016
Redwing Fuel Oil	20021814	Red	1½	MXF	75	532-016
Redwing Fuel Oil	20021815	Red	1½	MXF	100	532-016
Redwing Fuel Oil	20021816	Red	1½	MXF	125	532-016
Redwing Fuel Oil	20021817	Red	1½	MXF	150	532-016
Redwing Fuel Oil	20021818	Red	1½	MXF	175	532-016
Redwing Fuel Oil	20128752	Red	1½	MXM	75	532-016
Redwing Fuel Oil	20021774	Red	1½	MXM	100	532-016
Redwing Fuel Oil	20021775	Red	1½	MXM	125	532-016
Redwing Fuel Oil	20021776	Red	1½	MXM	150	532-016
Redwing Fuel Oil	20021777	Red	1½	MXM	175	532-016

# LPG Delivery Pro™

## Bobtail Applications | UL Approved Assemblies



A rugged delivery hose for residential and commercial delivery/transfer of liquid propane gas. The unique rubber compounding provides excellent cold weather flexibility, durable abrasion-resistant cover and significant reduction in contaminants. Rated to temperatures of -40°F to 180°F (-40°C to 82°C). Meets all current UL, CGA & DOT standards. Not for LP appliances or other consumer applications. Approved applications include Bobtail Delivery, LPG Dispensing Pumps and Industrial Portable Heaters.

**Tube**

Black Nitrile

**Cover**

Synthetic rubber

**Reinforcement**

Four textile spiral reinforcement

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
LPG Delivery Pro	20581706	Black	1/2	MMOT	100	581-412
LPG Delivery Pro	20487242	Black	3/4	MMOT	150	581-412
LPG Delivery Pro	20458416	Black	1	MMOT	150	581-412
LPG Delivery Pro	20943899	Black	1¼	MMOT	100	581-412
LPG Delivery Pro	20796315	Black	1½	MMOT	125	581-412


Call Customer Service or Field Sales for additional lengths

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
LPG Delivery Pro - Spiral	20710255	Black	1	MMOT 1" NPTF	100	581-412
LPG Delivery Pro - Spiral	20458415	Black	1	MMOT 1" NPTF	125	581-412
LPG Delivery Pro - Spiral	20458416	Black	1	MMOT 1" NPTF	150	581-412
LPG Delivery Pro - Spiral	20708132	Black	1	MMOT 1" NPTF	175	581-412



# Steam

Crimped Steam Assemblies not only provide a permanently coupled fitting to your hose, but form a tight crimp that reduces leaks (which saves money and energy) and eliminates bulky bolt clamps while reducing potential for damage from snagging on personnel or property. See our Ready 2 Go selection of EPDM and Chlorobutyl steam assemblies.

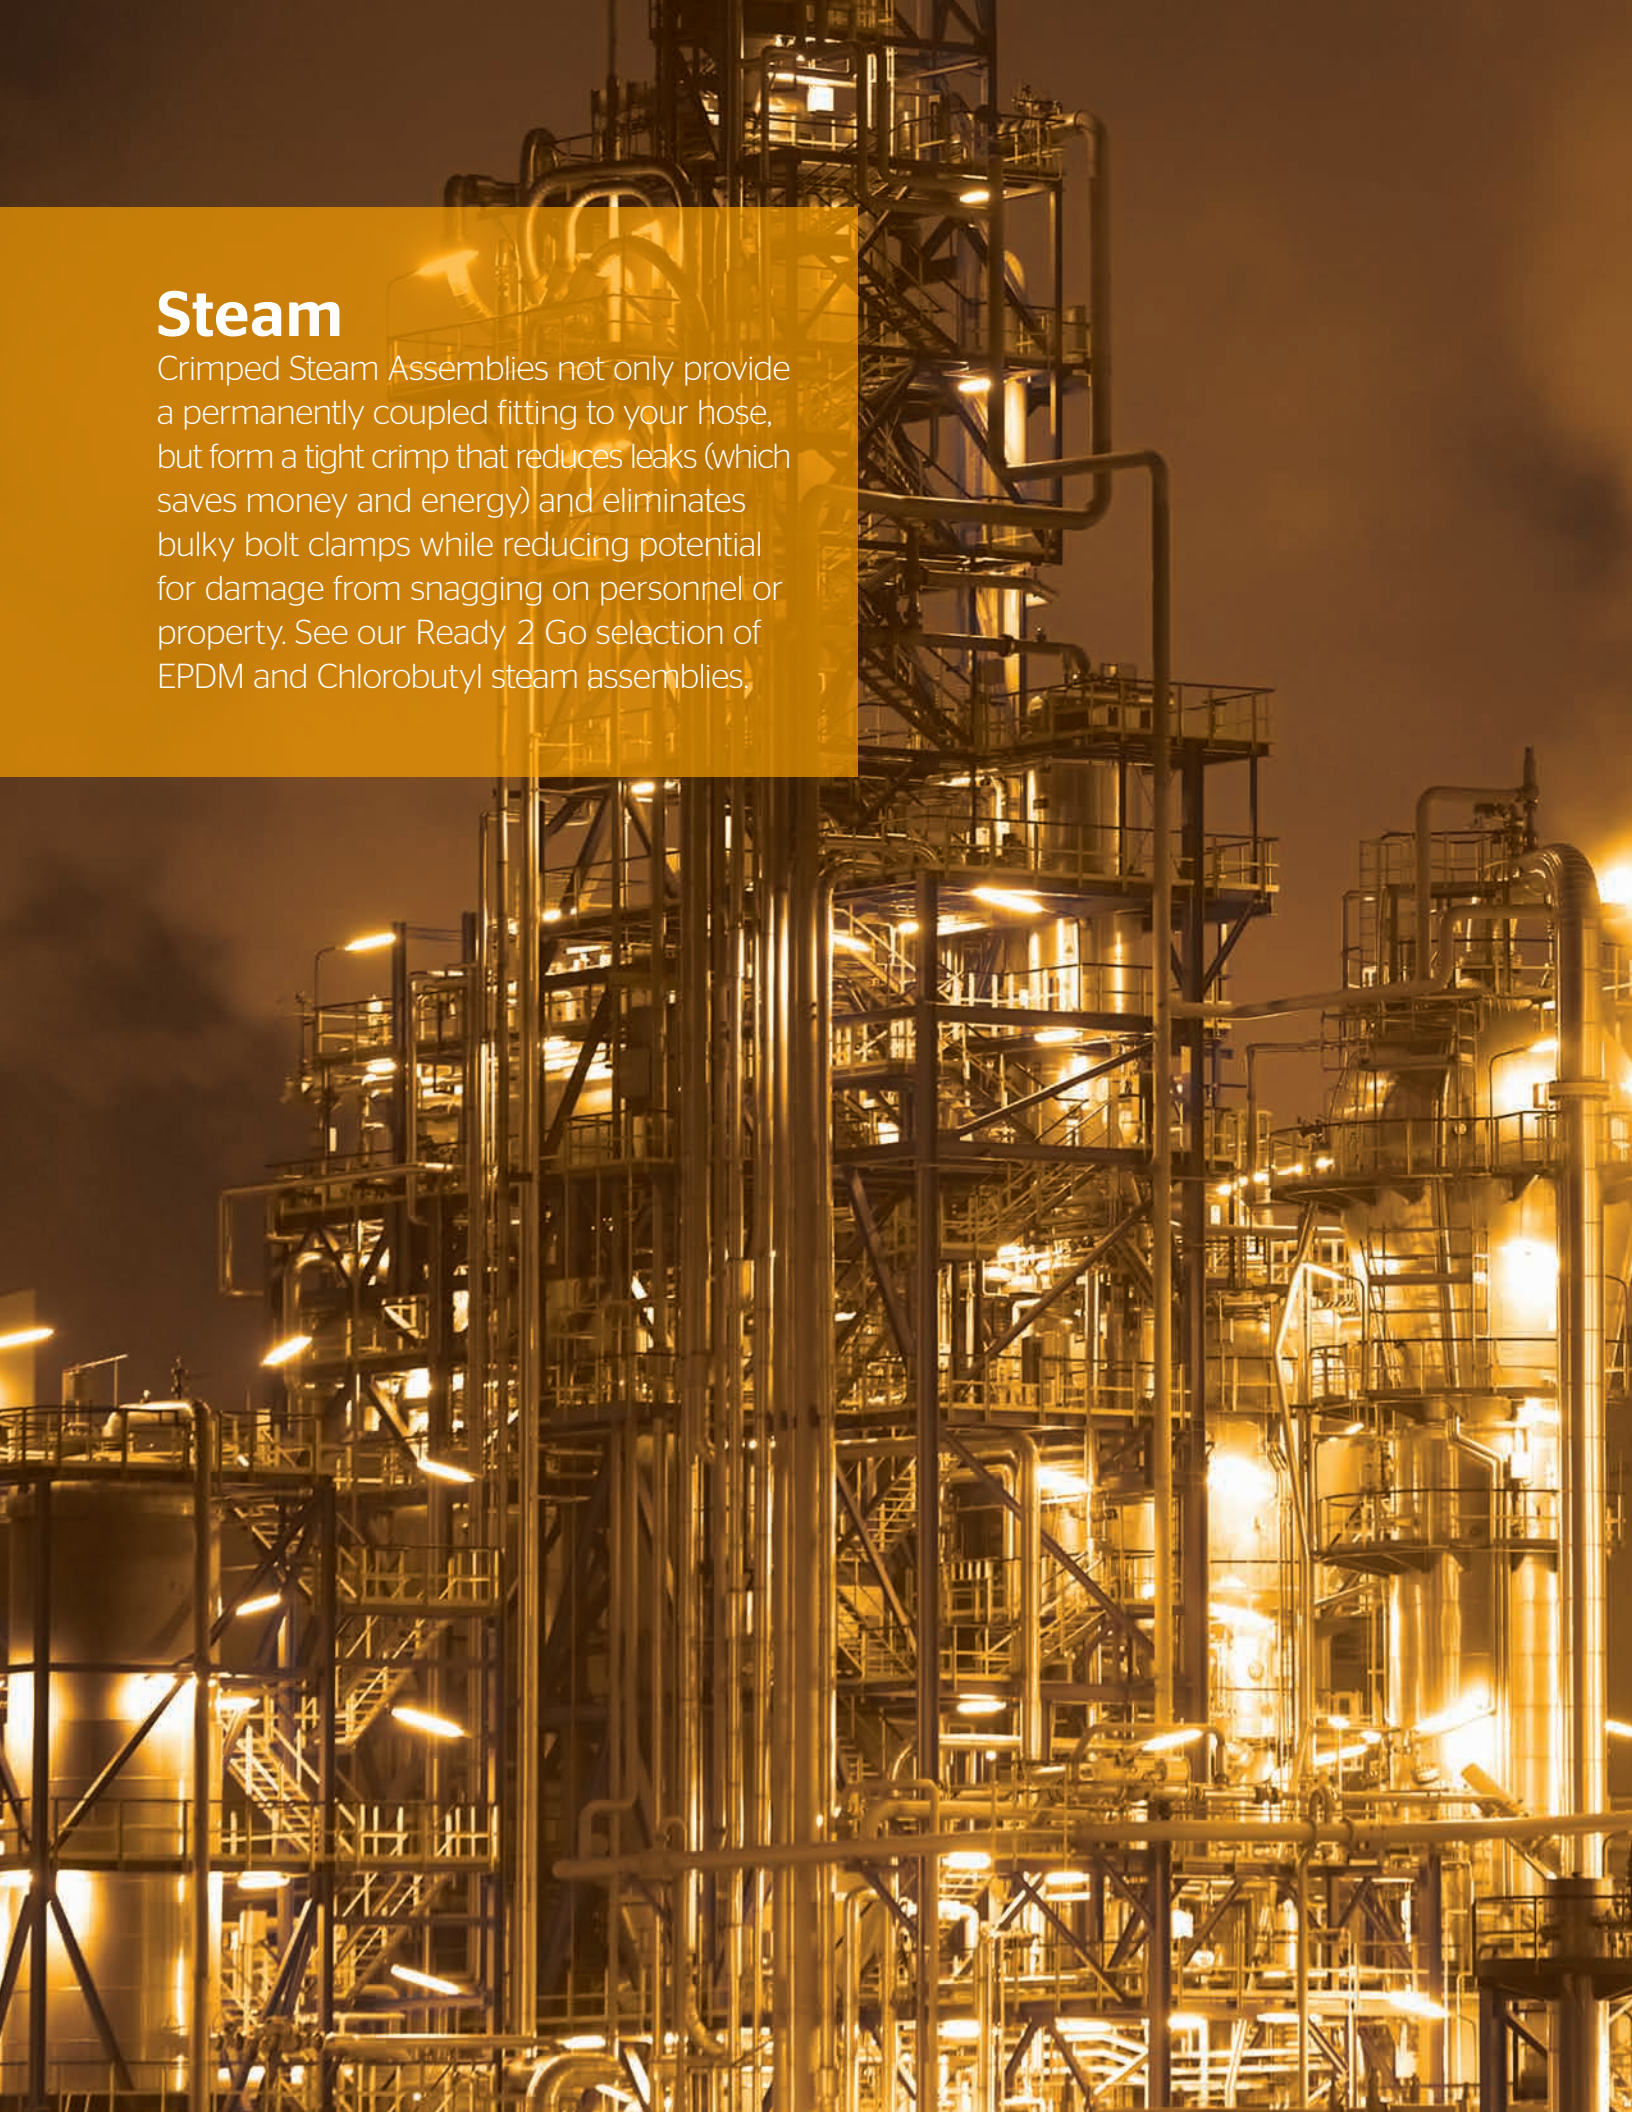

# Flexsteel® 250 EPDM

## Crimped Steam Assembly



Used for cleaning, heat control, fire prevention, pumping, thawing, blowout service, steam pumps and hoists in open-end or permanent installation operations. It is used in refineries, shipyards, chemical plants, steel mills, foundries and heavy industrial applications where high strength is required and where severe environmental conditions are encountered. Rated to temperatures of -40°F to 450°F (-40°C to 232°C).

**Tube**

Pyrosyn® synthetic rubber

**Cover**

Black or red Pyrosyn® finish, pin-pricked

**Reinforcement**

Braided steel wire (3/4" and higher have 2 steel wire braids)

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Flexsteel 250	20257721	Black	3/4	MXM	10	539-070
Flexsteel 250	20268029	Black	3/4	MXM	25	539-070
Flexsteel 250	20228557	Black	3/4	MXM	50	539-070
Flexsteel 250	20258882	Black	3/4	MXM	100	539-070
Flexsteel 250	20389501	Black	3/4	MXM	150	539-070
Flexsteel 250	20588579	Black	3/4	MXMS	50	539-070
Flexsteel 250	20229468	Black	3/4	FXF	25	539-070
Flexsteel 250	20285749	Black	3/4	FXF W/ GMS-3 SPUD	25	539-070
Flexsteel 250	20236009	Black	3/4	FXF	50	539-070
Flexsteel 250	20237858	Black	3/4	FXF W/ GMS-3 SPUD	50	539-070
Flexsteel 250	20228671	Black	3/4	MXF	25	539-070
Flexsteel 250	20240370	Black	3/4	MXF W/ GFS-3 SPUD	25	539-070
Flexsteel 250	20228670	Black	3/4	MXF	50	539-070
Flexsteel 250	20254451	Black	3/4	MXF W/ GFS-3 SPUD	100	539-070
Flexsteel 250	20442968	Black	3/4	MSXF	50	539-070
Flexsteel 250	20357732	Black	3/4	MSXF W/ GFS-3 SPUD	50	539-070
Flexsteel 250	20564717	Black	3/4	MSXF	100	539-070
Flexsteel 250	20527521	Black	3/4	MSXMS	50	539-070
Flexsteel 250	20228830	Red	3/4	MXM	25	539-076
Flexsteel 250	20237935	Red	3/4	MXM	50	539-076
Flexsteel 250	20484093	Red	3/4	MXM	75	539-076
Flexsteel 250	20240200	Red	3/4	MXM	100	539-076
Flexsteel 250	20588671	Red	3/4	MXMS	50	539-076
Flexsteel 250	20292451	Red	3/4	FXF	25	539-076
Flexsteel 250	20248776	Red	3/4	FXF	50	539-076
Flexsteel 250	20525389	Red	3/4	FXF	100	539-076
Flexsteel 250	20226860	Red	3/4	MXF	25	539-076
Flexsteel 250	20228809	Red	3/4	MXF	50	539-076
Flexsteel 250	20230360	Red	3/4	MXF W/ GFS-3 SPUD	50	539-076
Flexsteel 250	20357733	Red	3/4	MSXF W/ GFS-3 SPUD	50	539-076

Continued on next page



Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Flexsteel 250	20369545	Black	1	MXM	10	539-070
Flexsteel 250	20147873	Black	1	MXM	25	539-070
Flexsteel 250	20147731	Black	1	MXM	50	539-070
Flexsteel 250	20297568	Black	1	MXM	100	539-070
Flexsteel 250	20191540	Black	1	FXF	25	539-070
Flexsteel 250	20224084	Black	1	FXF	50	539-070
Flexsteel 250	20528681	Black	1	FXF W/ GFS-4 SPUD	50	539-070
Flexsteel 250	20348682	Black	1	FXF	75	539-070
Flexsteel 250	20284404	Black	1	FXF	100	539-070
Flexsteel 250	20140280	Black	1	MXF	25	539-070
Flexsteel 250	20140281	Black	1	MXF	50	539-070
Flexsteel 250	20316963	Black	1	MXF W/ GFS-4 SPUD	50	539-070
Flexsteel 250	20176832	Black	1	MXF	75	539-070
Flexsteel 250	20248186	Red	1	MXM	50	539-076
Flexsteel 250	20207274	Red	1	FXF	50	539-076
Flexsteel 250	20463125	Red	1	FXF	100	539-076
Flexsteel 250	20147877	Red	1	MXF	25	539-076
Flexsteel 250	20130059	Red	1	MXF	50	539-076

## Flexsteel® 250 CB Extreme

### Crimped Steam Assembly



The Flexsteel® 250 CB Extreme Crimp Hose is the only Continental chlorobutyl steam hose with an enhanced over-the-cover crimp coupling solution. The hose is rated to a maximum operating pressure of 250 psi, and its temperature range is -40°F to 425°F (-40°C to 218°C) (up to 450°F (218°C) intermittent), with a 10:1 safety factor. And it's the only Continental CB steam hose with a crimp solution.

**Tube**

Chlorobutyl synthetic rubber

**Cover**

Black or Red Pyrosyn®, pin-pricked

**Reinforcement**

Braided Steel Wire (3/4" and larger have two steel wire braids)

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Flexsteel 250 CB Extreme	20670134	Black	3/4	MXM	50	539-870
Flexsteel 250 CB Extreme	20670137	Black	3/4	MXF	50	539-870
Flexsteel 250 CB Extreme	20670138	Red	3/4	MXM	50	539-876
Flexsteel 250 CB Extreme	20670139	Red	3/4	MXF	50	539-876
Flexsteel 250 CB Extreme	20697367	Red	3/4	FXF	50	539-876

Continued on next page

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Flexsteel 250 CB Extreme	20767513	Black	3/4	MSXF w/ GFS-3 Spud	50	539-870
Flexsteel 250 CB Extreme	21030722	Black	3/4	MXF w/ GFS-3 Spud	50	539-870
Flexsteel 250 CB Extreme	21030723	Black	3/4	MXF w/ GFS-3 Spud	25	539-870
Flexsteel 250 CB Extreme	21030773	Black	3/4	FXF w/ GFS-3 Spud	50	539-870
Flexsteel 250 CB Extreme	21030776	Black	3/4	FXF w/ GFS-3 Spud	25	539-870
Flexsteel 250 CB Extreme	20767514	Red	3/4	MSXF w/ GFS-3 Spud	50	539-876
Flexsteel 250 CB Extreme	21030749	Red	3/4	FXF w/ GFS-3 Spud	50	539-876
Flexsteel 250 CB Extreme	21030771	Red	3/4	FXF w/ GFS-3 Spud	25	539-876
Flexsteel 250 CB Extreme	21030777	Red	3/4	MXF w/ GFS-3 Spud	50	539-876
Flexsteel 250 CB Extreme	21030821	Red	3/4	MXF w/ GFS-3 Spud	25	539-876

## Steam Fitting Options



(F)

**Ground Joint Wing Nut**



(F w/ GFS-3 Spud)

**Ground Joint Wing Nut with Female NPT SPUD**



(M)

**Male NPT Swivel (Available as a Male NPT)**



(FL)

**Ground Joint Low Profile Nut with Female NPT SPUD**

Note: Special fitting combinations available upon request.

Crimped steam assembly application: Coupling assembly crimps permanently onto hose, forms a tight crimp that reduces leaks and eliminates bulky bolt clamps while reducing potential for damage from snagging on personnel or property.

## Specialty

For mining applications to control dust on mining machinery up to 1000 psi and fire engine booster service to 800 psi, count on Continental hose brands to meet the demands of your specialty applications.



## Fire Engine Booster

800 psi WP



For use in high-pressure fire engine booster service. Also has many applications in other heavy-duty industrial and municipal operations. Rated to temperatures of 0°F to 180°F (-18°C to 82°C).

**Tube**

Synthetic rubber

**Cover**

Red synthetic rubber

**Reinforcement**

Braided (2) synthetic yarn

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Fire Engine Booster	20023056	Red	3/4	MXF Chrome 1¼"	50	536-382
Fire Engine Booster	20023057	Red	3/4	MXF Chrome 1¼"	100	536-382
Fire Engine Booster	20023068	Red	1	MXF Chrome 1½"	50	536-382
Fire Engine Booster	20023069	Red	1	MXF Chrome 1½"	100	536-382

## Flexsteel® Mine Spray



For general underground water spray service in dust control application. It is also used on continuous mining machinery at the headface and on other mechanical mining machines. Rated to temperatures of -20°F to 210°F (-29°C to 99°C).

**Tube**

Nitrile synthetic rubber RMA Class B (Medium Oil Resistance)

**Cover**

Yellow Chemivic® synthetic rubber RMA Class B (Medium Oil Resistance) Meets flame test requirements of MSHA Schedule 26-Section 18.65, smooth finish

**Reinforcement**

Braided (1) steel wire

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Flexsteel Mine Spray	20687831	Yellow	3/4	MXMS	25	539-421
Flexsteel Mine Spray	20692509	Yellow	3/4	MSXMS	25	539-421
Flexsteel Mine Spray	20139630	Yellow	3/4	MXMS	50	539-421
Flexsteel Mine Spray	20316978	Yellow	3/4	MXM	50	539-421
Flexsteel Mine Spray	20527304	Yellow	3/4	Male NPT X Female NPT	50	539-421
Flexsteel Mine Spray	20687832	Yellow	3/4	MXMS	50	539-421
Flexsteel Mine Spray	20692550	Yellow	3/4	MSXMS	50	539-421
Flexsteel Mine Spray	20139632	Yellow	3/4	MXMS	75	539-421
Flexsteel Mine Spray	20323517	Yellow	3/4	FXF JIC	100	539-421
Flexsteel Mine Spray	20531976	Yellow	3/4	MXM	100	539-421
Flexsteel Mine Spray	20687833	Yellow	3/4	MXMS	100	539-421
Flexsteel Mine Spray	20692552	Yellow	3/4	MSXMS	100	539-421
Flexsteel Mine Spray	20770959	Yellow	1/2	MXM	50	539-421
Flexsteel Mine Spray	20316979	Yellow	1	MXM	50	539-421
Flexsteel Mine Spray	20527305	Yellow	1	Male NPT X Female NPT	50	539-421
Flexsteel Mine Spray	20531977	Yellow	1	MXM	100	539-421

Continued on next page

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Flexsteel Mine Spray	20317100	Yellow	1¼	MXM	50	539-421
Flexsteel Mine Spray	20527306	Yellow	1¼	MXF	50	539-421
Flexsteel Mine Spray	20424729	Yellow	1¼	MXF JIC	50	539-421
Flexsteel Mine Spray	20531978	Yellow	1¼	MXM	100	539-421
Flexsteel Mine Spray	20317101	Yellow	1½	MXM	50	539-421
Flexsteel Mine Spray	20340871	Yellow	1½	MXM W/ FSA	50	539-421
Flexsteel Mine Spray	20346010	Yellow	1½	MXF JIC	50	539-421
Flexsteel Mine Spray	20424761	Yellow	1½	MXF JIC	50	539-421
Flexsteel Mine Spray	20531979	Yellow	1½	MXM	100	539-421

## Hydrocarbon Drain



Hydrocarbon Drain has a high temperature, oil-resistant tube designed to displace hot, liquified product from steam cleaning operations. Temperature rating is -40°F to 275°F (-40°C to 135°C).

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Hydrocarbon Drain	20677039	Blue	3/4	MXM - B2-NPM-1212	25	547-819
Hydrocarbon Drain	20733235	Blue	3/4	MXM - B2-NPM-1212	50	547-819
Hydrocarbon Drain	21010841	Blue	1	MXM - B2-NPM-1616	50	547-819

Campbell Air Hammer Coupling also available. Contact customer service for a quote or part number.

**Tube**

Black Nitrile

**Cover**

Blue Chlorosulfonated Polyethylene

**Reinforcement**

One-wire braid

## Nitrogen Service Hose with Thor Double Lock Fitting



For in-plant nitrogen service at petrochemical plants, refineries and general manufacturing. Featuring the patented Campbell thor double lock fittings with yellow locking nitrogen ring. Allows for no cross contamination, making it the safest nitrogen assembly on the market.

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Nitrogen Service Hose	21027729	Yellow	3/4	Coupled Assemblies	50	569-516

**Tube**

EPDM synthetic rubber

**Cover**


EPDM synthetic rubber

**Reinforcement**

4-spiral polyester

## Water-Consumer

From consumer to commercial grade, thermoplastic to rubber construction, cold to hot water service, Ready 2 Go garden hoses are available in 5/8" and 3/4" diameters.

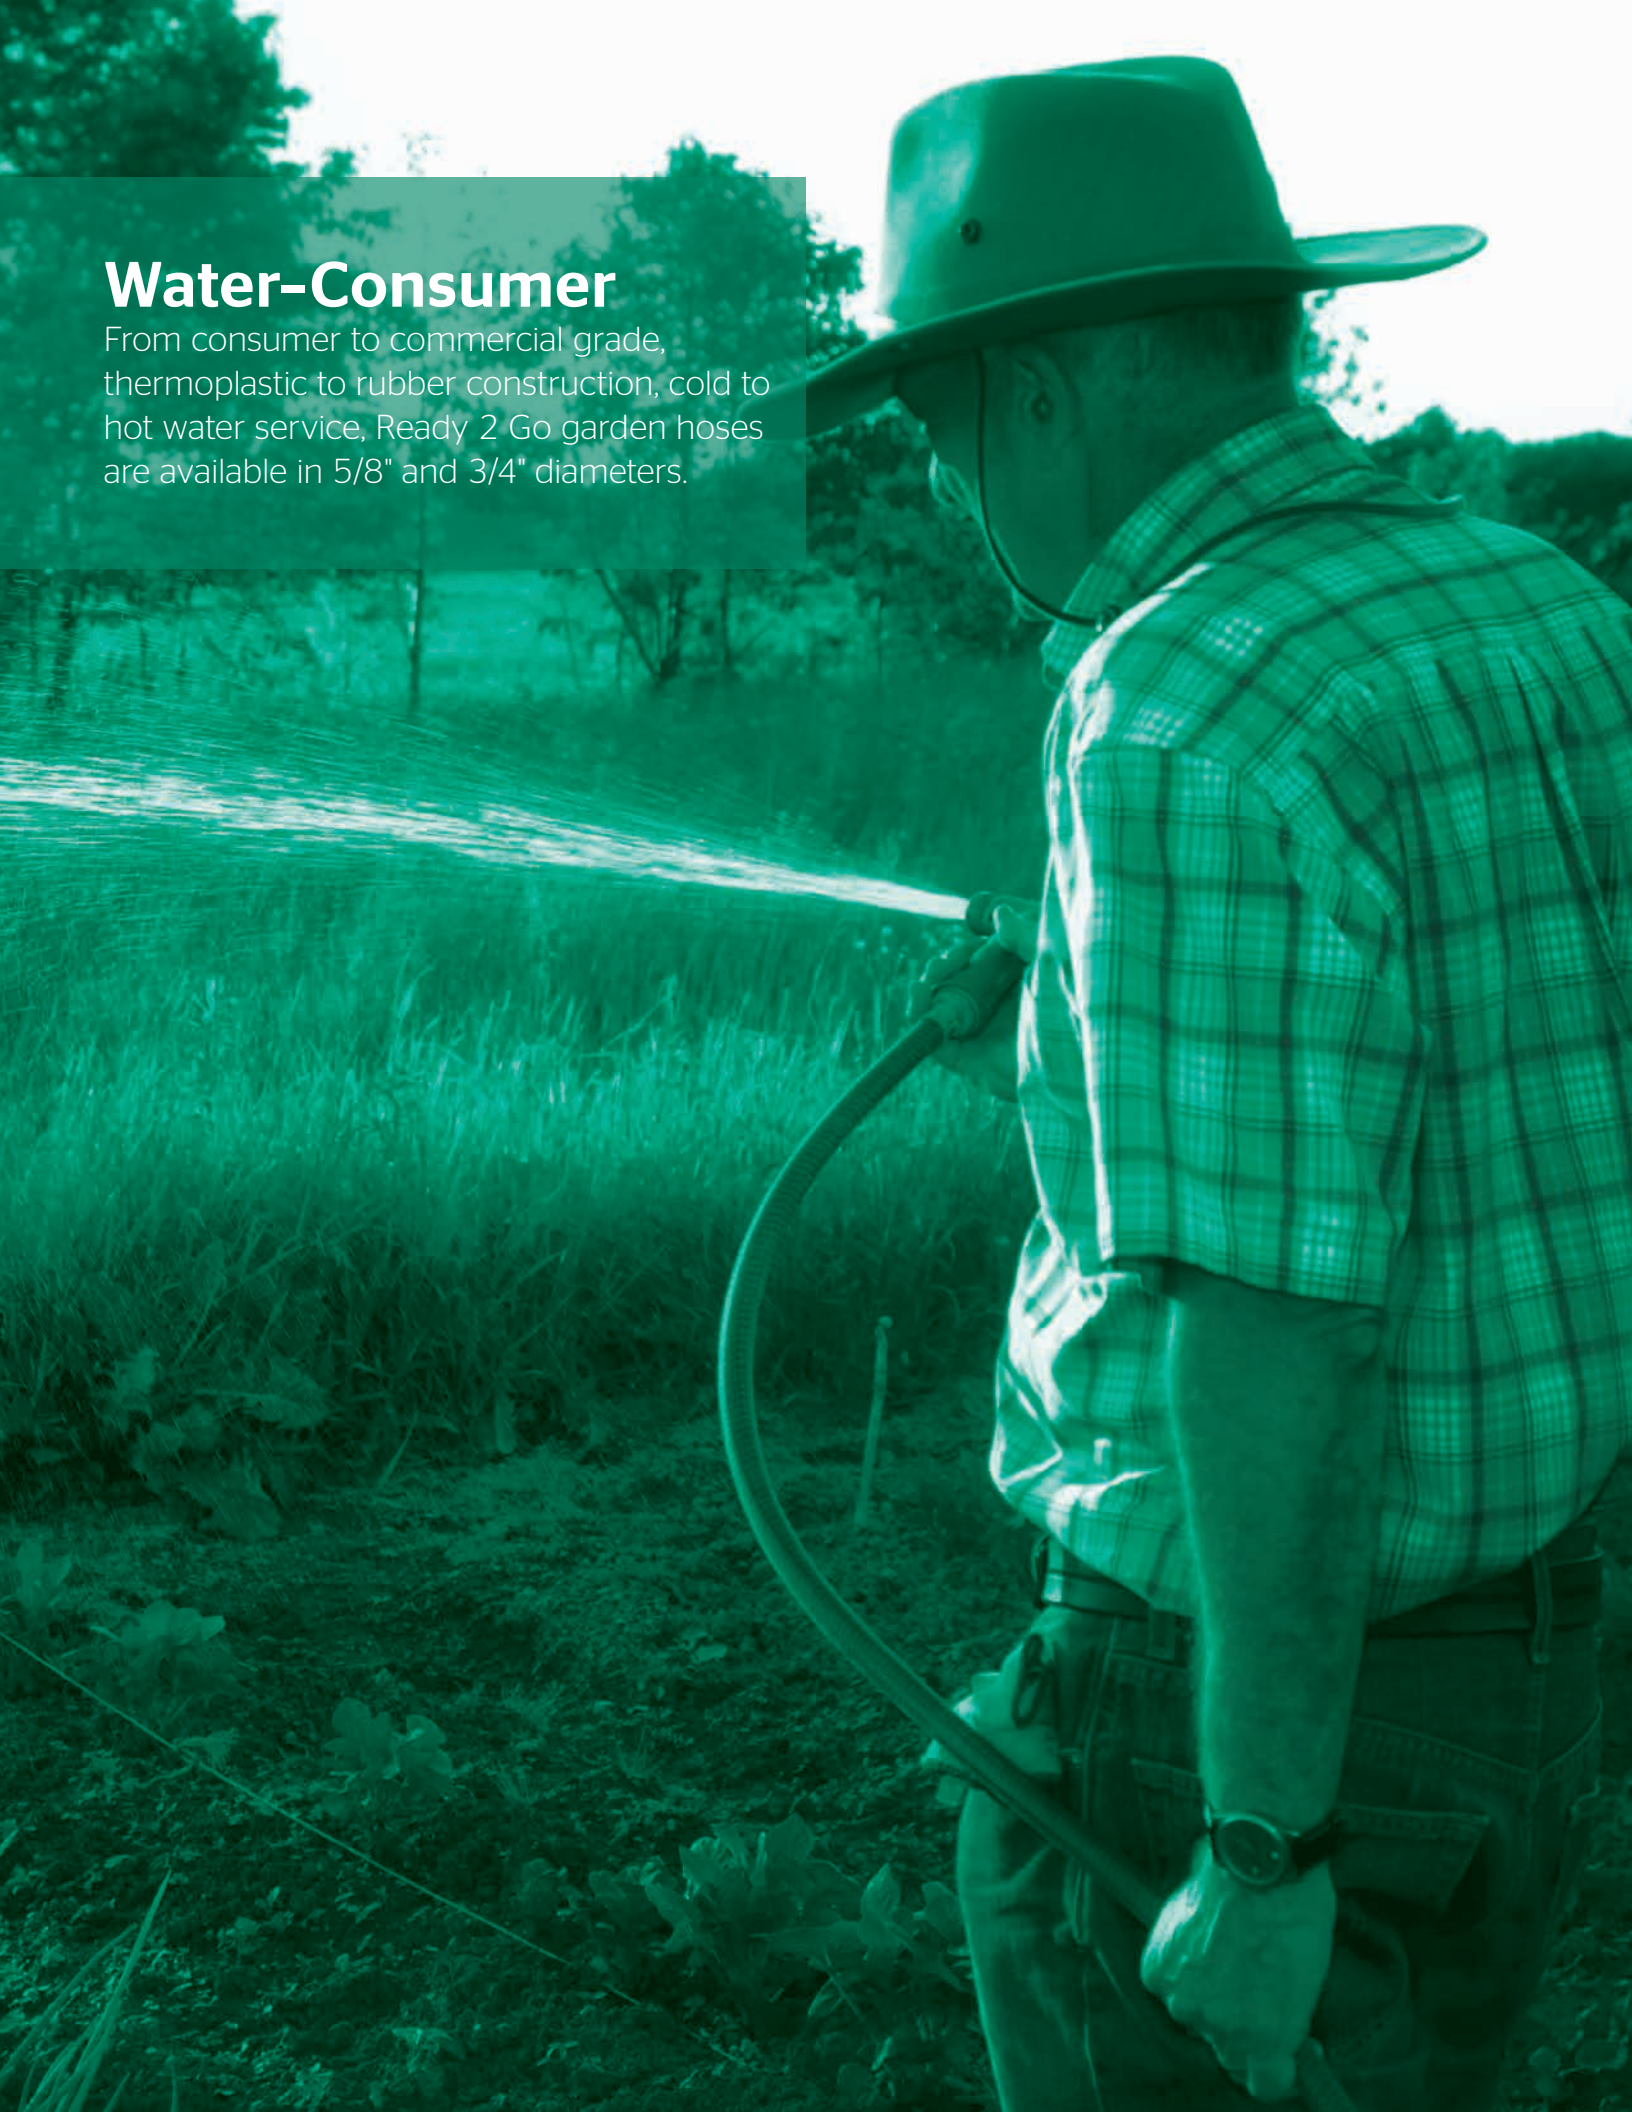

## YardMaster™ Garden Hose



Experience the next generation of garden hose. Rated to temperatures of -40°F to 158°F (-40°C to 70°C).

**Length**

50'

**Size**

5/8"

**Features**

- › Thermoplastic elastomer hybrid materials
- › 20% lighter than rubber garden hoses
- › Improved flexibility at low temperatures

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
YardMaster	20583057	Green	5/8	MF Brass 5/8" GHT	50	540-453
YardMaster	20530170	Green	1/2	MF Brass 1/2" GHT	50	540-453

## Heavy Duty + Cold Water Premium Rubber Hose Heavy Duty Abrasion Resistance



Commercial cold-water premium rubber hose that is reinforced for high burst strength. It's abrasion and weather resistant with flexibility in cold temperatures. Featuring crush-resistant brass fittings. Rated to temperatures of -40°F to 160°F (-40°C to 71°C).

**Features**

- › Reinforced for high burst strength
- › Abrasion- and weather-resistant
- › Crush-resistant brass fittings
- › 5/8" inside diameter

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
Prem. Rubber Garden Hose	20582671	Black	5/8	MF Brass 5/8" GHT	50	569-029
Prem. Rubber Garden Hose	21054064	Green	5/8	MF Brass 5/8" GHT	50	569-031
Prem. Rubber Garden Hose	21054063	Orange	5/8	MF Brass 5/8" GHT	50	569-030

## Heavy Duty + Hot Water Premium Rubber Hose

Hot Water



Commercial hot water premium rubber hose that is reinforced for high burst strength. It is abrasion and weather resistant with flexibility in cold temperatures. Featuring crush-resistant brass fittings.

**Length**

50'

**Size**

5/8"

**Features**

- › Premium hot water hose
- › Abrasion resistant
- › Flexible in cold temperatures
- › Internal spring coil prevents kinking at faucet
- › Crush-resistant brass fittings

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
Comm. Grade Hot Water Hose	20582672	Red	5/8	MF Brass 5/8" GHT	50	569-028

## Blue Fortress® 300 with Washdown assembly



A high-quality-construction hose for hot water washdown and cleanup service up to 200°F (93°C). It can be used in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of the Blue Fortress® 300 hose incorporates Microban®\* antimicrobial built-in product protection.

**Tube**

White FDA compliant nitrile synthetic rubber

**Cover**

Blue Carbryn™ synthetic rubber, ARPM Class A (High Oil Resistance) with Microban® product protection

**Reinforcement**

Spiral synthetic yarn

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
Blue Fortress 300	21050175	Blue	1/2	Bulk	50	569-121
Blue Fortress 300	21050144	Blue	3/4	Bulk	50	569-121

Campbell Stainless Steel Male Pipe x Eco Brass Female Swivel - 100% FDA compliant



## Super Sani-Wash™ 300 with Washdown assembly



Super Sani-Wash™ is an economical hose for hot water washdown and cleanup, up to 200°F (93°C). Use this hose in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. The cover of the Super Sani-Wash™ 300 washdown hose incorporates Microban® antimicrobial built-in product protection.

**Tube**

EPDM synthetic rubber

**Cover**

White EPDM synthetic rubber with Microban® product protection

**Reinforcement**

Spiral textile reinforced

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Super Sani-Wash 300	21050173	White	1/2	Reels	50	569-021
Super Sani-Wash 300	21050142	White	3/4	Reels	50	569-021

\*Microban® antimicrobial product protection inhibits the growth of bacteria, mold and fungi that can cause odor, stains or degradation of the hose cover. Microban® is intended to protect the hose cover only. It is not a substitute for good sanitary practices.

Campbell Stainless Steel Male Pipe x Eco Brass Female Swivel - 100% FDA compliant

## Sani-Wash™ 300 with Washdown assembly



Sani-Wash™ 300 is an economical hose for hot water washdown and cleanup, up to 205°F (96°C). Use this hose in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries.

**Tube**

EPDM synthetic rubber

**Cover**

White EPDM synthetic rubber

**Reinforcement**

Textile reinforced

Product Name	Part #	Hose Color	Hose ID	Packaging	Length	Material #
			in.		ft.	
Sani-Wash 300	21050171	White	1/2	500' reels, maximum 3 pieces, 50' increments	50	569-020
Sani-Wash 300	21050178	White	3/4	500' reels, maximum 3 pieces, 50' increments	50	569-020

Campbell Stainless Steel Male Pipe x Eco Brass Female Swivel - 100% FDA compliant

## Welding

Meeting your RMA IP-7 Welding Grade T and Grade R needs, Continental branded welding hose is available in dual green and red in 3/8" or 1/4" diameters to 200 PSI working pressure.



## Twin-Line Welding Grade R

Welding Grade R-Type VD



For welding service. Meets RMA IP-7 standard for Grade R welding hose. Rated to temperatures of -40°F to 120°F (-40°C to 49°C).

**Tube**

EPDM synthetic rubber compatible with oxygen and acetylene gases

**Cover**

EPDM synthetic rubber smooth surface

**Reinforcement**

Spiral synthetic yarn

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
Twin-Line Welding Hose Grade R	20027151	Red/Green	1/4	1/4" Grade R Type BB Fit.	25	569-588
Twin-Line Welding Hose Grade R	20027152	Red/Green	1/4	1/4" Grade R Type BB Fit.	50	569-588
Twin-Line Welding Hose Grade R	20027153	Red/Green	1/4	1/4" Grade R Type BB Fit.	100	569-588

## Twin-Line Welding Grade T

Welding Grade T-Type VD



For welding service. Meets RMA IP-7 and CGA E-1 standards for Grade T welding hose. Non-conductive. Rated to temperatures of -40°F to 120°F (-40°C to 49°C).

**Tube**

Synthetic rubber compatible with all common welding fuel gases\*

**Cover**

Chemivic™ synthetic rubber smooth cover

**Reinforcement**

Spiral synthetic yarn

Product Name	Part #	Hose Color	Hose ID in.	Packaging	Length ft.	Material #
Twin-Line Welding Hose Grade T	20027453	Red/Green	1/4	1/4" Grade T Type BB Fit.	50	569-618
Twin-Line Welding Hose Grade T	20027454	Red/Green	1/4	1/4" Grade T Type BB Fit.	100	569-618
Twin-Line Welding Hose Grade T	20027493	Red/Green	3/8	3/8" Grade T Type BB Fit.	25	569-618
Twin-Line Welding Hose Grade T	20027495	Red/Green	3/8	3/8" Grade T Type BB Fit.	50	569-618
Twin-Line Welding Hose Grade T	20027497	Red/Green	3/8	3/8" Grade T Type BB Fit.	100	569-618

**Welding Hose Compatibility Chart**

	Oxygen	Acetylene	Fuel Gases*	Flame & Oil Resistant Tube	Flame & Oil Resistant Cover
	Green	Red	Red		
Twin Line (Grade R)	Yes	Yes	No	No	No
Twin Line (Grade RM)	Yes	Yes	No	No	Yes
Twin Line (Grade T)	Yes	Yes	Yes	Yes	Yes
Single Line (Grade R)	Yes	Yes	No	No	No
Single Line (Grade RM)	Yes	Yes	No	No	Yes
Single Line (Grade T)	Yes	Yes	Yes	Yes	Yes

\*Fuel gases are defined in RMA IP-7 welding hose standard, Flammable compressed gases commonly used in the welding and cutting industry including, but not limited to, acetylene, hydrogen, methane/natural gas, LP gas, propylene and methylacetylene propadiene stabilized. RMA IP-7 and CGA E-1

## Industrial Fluid Solutions

Market segment

Industrial Hose

Contact

Continental

703 S. Cleveland Massillon Road

Fairlawn, OH 44333-3023 U.S.A.

1-800-235-4632

[www.continental-industry.com](http://www.continental-industry.com)

Your local contact

[www.contitech.de/contactlocator](http://www.contitech.de/contactlocator)

Canada

1-888-275-4397

Mexico

1-800-439-7373