

## GS



Size Range (In) ..... .75" to 12"  
 Standard Length (Ft) ..... 12'  
 Standard Color ..... iron oxide red  
 Temperature Range (°F) ..... -65° to 550°  
 ..... intermittent to 600°

- Double-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external filament fiberglass cord
- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Ideal for plastic processing applications
- Non-kinking
- Resistant to many oils and solvents, ozone, water, fungus and alkalis
- Not recommended for continuous flexing



**A** **F**




## CWGS



Size Range (In) ..... 2" to 12"  
 Standard Length (Ft) ..... 25'  
 Standard Color ..... iron oxide red  
 Temperature Range (°F) ..... -65° to 550°

- Single-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix
- Light weight and flexible
- Available in longer lengths than traditional mandrel-built hose
- Resistant to many oils and solvents, ozone, water, fungus and alkalis
- Not recommended for continuous flexing

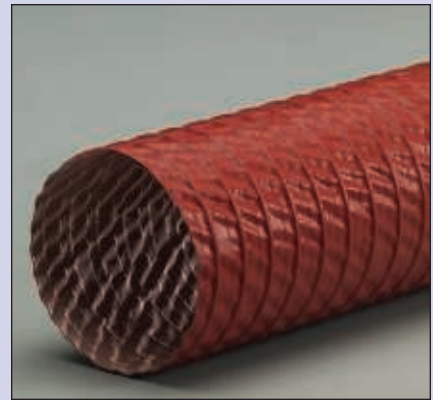


**A** **F**

## BDS



Size Range (In) ..... 1" to 10"  
 ..... custom to 12"  
 Standard Length (Ft) ..... 12'  
 Standard Color ..... iron oxide red  
 Temperature Range (°F) ..... -65° to 500°

- Single-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external filament fiberglass cord
- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Non-kinking
- Resistant to many oils and solvents, ozone, water, fungus and alkalis
- Not recommended for continuous flexing

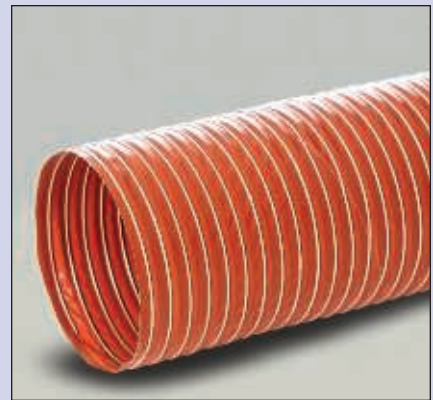

**A** **F**

## CW-325



Size Range (In) ..... 2" to 10"  
 ..... custom to 16"  
 Standard Length (Ft) ..... 25'  
 Standard Color ..... black  
 Temperature Range (°F) ..... -20° to 325°

- Single-ply acrylic coated polyester fabric hose reinforced with a spring steel wire helix
- Ideal for air and fume handling applications
- Excellent choice for overhead vehicle exhaust systems
- Light weight and flexible
- Listed as UL 94V-0 flame retardant
- Available with an external PVC wearstrip (CW-325-W)



**A** **F** **RU**

