


KanaChem RS (220RS)

All weather suction and discharge hose

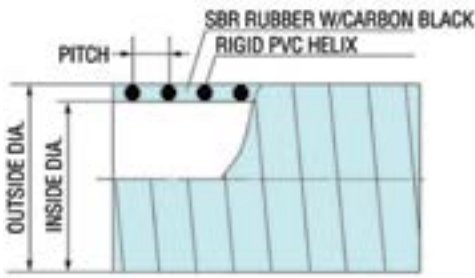

SPECIFICATIONS

Temp. Range: -40°F to 140°F

Applications: Heavy-duty liquid suction hose for use in construction dewatering, liquid waste, cesspool cleaning, septic handling, agricultural applications and marine use

Construction: SBR rubber with static carbon black, rigid PVC helix, smooth bore, smooth O.D.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1-1/2	1.85	0.35	3.0	50	29.8	0.50	100
2	2.40	0.39	4.0	50	29.8	0.74	100
2-1/2	2.99	0.56	5.0	50	29.8	1.01	100
3	3.50	0.59	6.0	43	29.8	1.30	100
4	4.57	0.65	9.0	38	29.8	2.01	100
6	6.69	0.87	15.0	23	28.0	3.37	60,100

