


KanaDuct 150 (150 CL)

Lightweight PVC blower and ducting hose

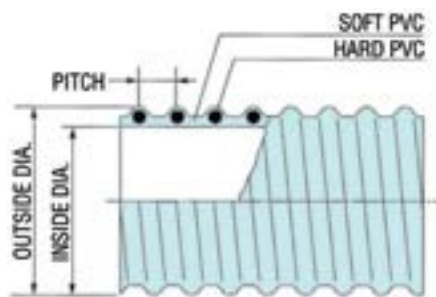

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: Lightweight general ducting for ventilation and grass clippings, leaves, dust and fumes

Construction: Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

Note: Not a food-grade hose

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2-1/2	2.81	0.55	2.5	6	—	0.37	50,100
3	3.37	0.59	3.0	6	—	0.54	50,100
4	4.41	0.61	4.0	5	—	0.71	50,100
5	5.55	0.80	5.0	3	—	1.00	50,100
6	6.51	0.80	6.0	3	—	1.29	50,100
7	7.54	0.85	7.0	2	—	1.38	50,100
8	8.55	0.85	8.0	2	—	1.71	50



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**