
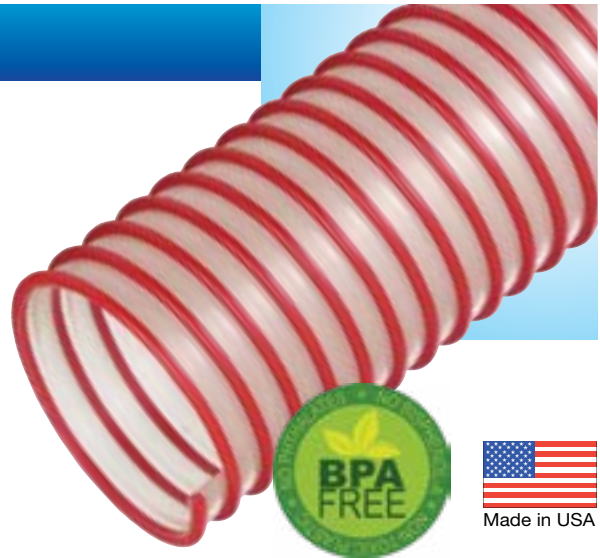


KanaDuct 150U (150 UDH)

Polyurethane medium-duty blower and ducting hose

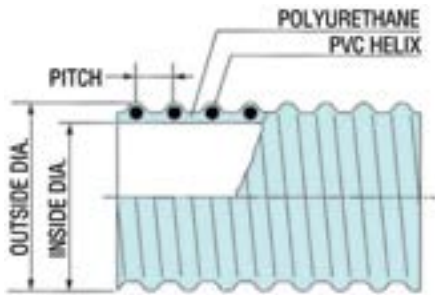

Suction & Discharge
Cold Weather/Flexible
Heavy-Duty
Abrasion Resistance
Petroleum
Food Grade
Duct
Specialty
Accessories

SPECIFICATIONS

Temp. Range: -40°F to 140°F

Applications: Medium-duty ducting and blower applications. For use with light to medium weight abrasives, leaf and grass collection, cotton pickers, mulch blowing, dust and sawdust collection.

Construction: Flexible clear polyurethane, rigid PVC helix, smooth bore, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Abrasion-resistant polyurethane and smooth bore eliminate material build-up.

Note: Not a food-grade hose

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2-1/2	2.89	0.53	2.5	9	16.0	0.34	50
3	3.46	0.57	3.0	8	15.0	0.48	50
4	4.46	0.59	4.0	7	12.0	0.70	50
5	5.57	0.83	5.0	6	9.0	1.10	50
6	6.56	0.83	6.0	5	7.0	1.30	50
7	7.59	0.85	7.0	4	6.0	1.56	50
8	8.59	0.85	8.0	3	5.0	1.65	50



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**