


# KanaDuct 620 (620 WD)

General ducting and blower hose with metal wire helix

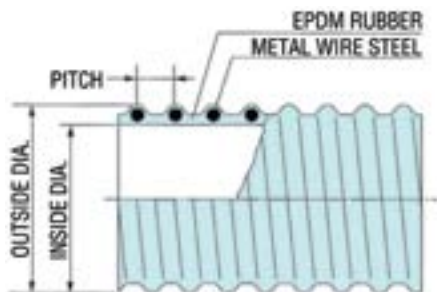

## SPECIFICATIONS

**Temp. Range:** -40°F to 220°F

**Applications:** General ducting and blower applications. For use with lightweight abrasives such as sawdust, grass clippings, street refuse and cotton pickers.

**Construction:** EPDM rubber, metal wire helix, smooth bore, slightly corrugated O.D.

**Features:** Rated to 220°F. Abrasion resistant yet very flexible. 100% rubber sidewall (no fabric).

## AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2	2.36	0.43	2.0	12	12.0	0.40	50
2-1/2	3.00	0.58	3.0	12	9.0	0.44	50
3	3.37	0.60	3.0	12	8.0	0.55	50
4	4.39	0.65	4.0	9	6.0	0.73	50
5	5.43	0.88	5.0	7	5.0	0.84	50
6	6.36	0.87	6.0	6	4.0	1.04	50
7	7.32	0.89	7.0	5	4.0	1.17	50
8	8.35	0.92	8.0	4	4.0	1.38	50
10	10.45	1.02	10.0	3	4.0	2.40	50
12	12.40	1.20	12.0	3	4.0	2.50	25



\* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**