


KanaDuct 625 (620 WD WS)

General ducting and blower hose with metal wire helix and external wear strip

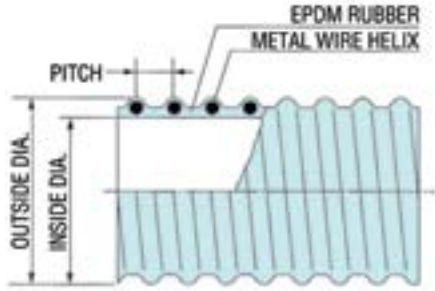

SPECIFICATIONS

Temp. Range: -40°F to 220°F

Applications: Same as 620 WD, but external wearstrip makes it ideal for “light dragging” applications

Construction: EPDM rubber, metal wire helix, wearstrip, smooth bore, corrugated O.D.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2-1/2	3.11	0.58	3.0	12	9.0	0.48	50
3	3.48	0.60	3.0	12	8.0	0.61	50
4	4.57	0.65	4.0	9	6.0	0.85	50
5	5.61	0.88	5.0	7	5.0	0.90	50
6	6.54	0.87	6.0	6	4.0	1.17	50
7	7.48	0.89	7.0	5	4.0	1.27	50
8	8.54	0.92	8.0	4	4.0	1.50	50
10	10.69	1.02	10.0	3	4.0	2.67	50
12	12.60	1.20	12.0	3	4.0	2.80	25



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**