


KanaDuct 630 (630 ED)

Medium-duty blower and ducting hose

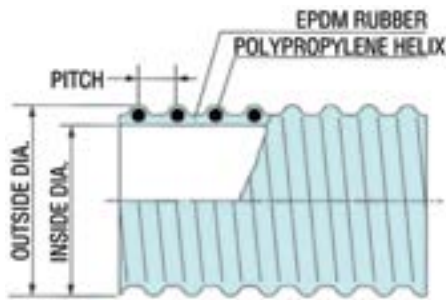

Suction & Discharge
Cold Weather/Flexible
Heavy-Duty
Abrasion Resistance
Petroleum
Food Grade
Duct
Specialty
Accessories

SPECIFICATIONS

Temp. Range: -40°F to 158°F

Applications: Medium-duty blower and ducting applications such as hay baling, street refuse, grain dust, cotton pickers, wood chips, straw blowing, leaf and grass collection

Construction: EPDM rubber, polypropylene helix, smooth bore, corrugated O.D.

Features: Thicker sidewall for more abrasion resistance. External helix acts as a scuff guard. 100% rubber sidewall (no fabric).

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2	2.36	0.39	3.5	—	—	0.31	50
2-1/2	2.89	0.56	3.5	—	—	0.38	50
4	4.53	0.67	4.0	—	—	0.70	50
6	6.56	0.83	6.0	—	—	1.05	50
8	8.66	0.87	8.0	—	—	1.46	50



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**