


KanaDuct 660 (660 YD)

Heavy-duty duct hose with “safety yellow” helix for high visibility

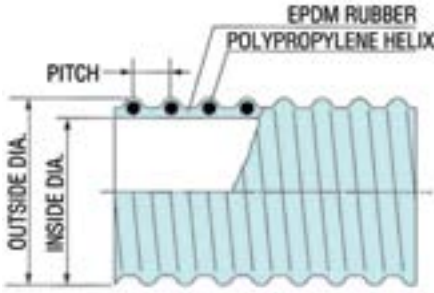

SPECIFICATIONS

Temp. Range: -40°F to 158°F

Applications: Heavy-duty ducting applications such as duct cleaning, commercial grass and leaf collection, cement dust recovery for floor finishing, blast cabinet dust collection systems, and grain auger downspouts

Construction: EPDM rubber, polypropylene helix, smooth bore, corrugated O.D.

Features: Smooth bore for higher laminar flow. Extra heavy-duty “safety yellow” helix for high visibility and superior external abrasion resistance for “dragging” applications. 100% rubber sidewall (no fabric).

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
4	4.57	0.67	4.0	9	6.0	0.79	50
5	5.53	0.87	5.0	7	5.0	0.83	50
6	6.57	0.82	6.0	6	4.0	1.26	50
8	8.72	0.83	8.0	4	4.0	1.92	50
10	10.83	1.06	10.0	4	4.0	2.38	25
12	12.73	1.18	12.0	3	3.0	2.65	25



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**