


Kanaflo MK (212 MK)

Heavy-duty food grade suction and discharge hose

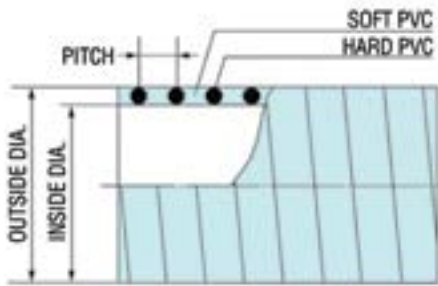

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: More flexible; designed for milk hauling (tank truck) and pick-up

Construction: Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

Note: Made with NSF51 approved materials

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1-1/2	1.82	0.30	2.0	66	29.8	0.44	100
2	2.39	0.33	2.5	66	29.8	0.74	100
2-1/2	2.93	0.37	4.7	66	29.8	1.01	100
3	3.43	0.37	6.1	62	29.8	1.21	100

