


Kanaline FW

Heavy-duty food grade suction and discharge hose

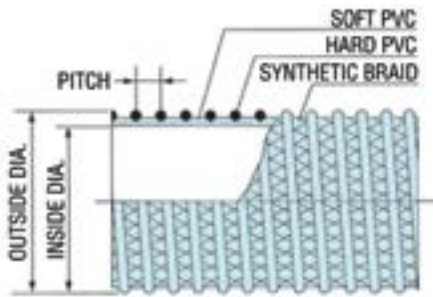

Suction & Discharge
Cold Weather/Flexible
Heavy-Duty
Abrasion Resistance
Petroleum
Food Grade
Duct
Specialty
Accessories

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: Heavy-duty food grade suction and discharge hose for bottling, wine making, canning, dairy, brewing and liquid foods

Construction: Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, synthetic braiding, smooth bore, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Rated for both suction and discharge. Clear sidewall permits visual check of material flow.

Note: Made with NSF51 approved materials. Banding coil must be used for all sizes. 5" and 6" sizes are not a stock item. Consult factory for availability.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1-1/2	2.1	0.39	2.5	110	28.0	0.56	60,100
2	2.6	0.41	4.0	100	28.0	0.75	60,100
3	3.7	0.59	6.3	100	28.0	1.20	60,100
4	4.8	0.65	7.1	75	28.0	1.74	60,100
5	6.1	0.87	9.2	70	28.0	2.90	Not stock item
6	7.3	0.93	10.2	70	28.0	3.88	Not stock item



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**