


Kanalite 155 (155 GY)

Heavy-duty PVC blower and ducting hose

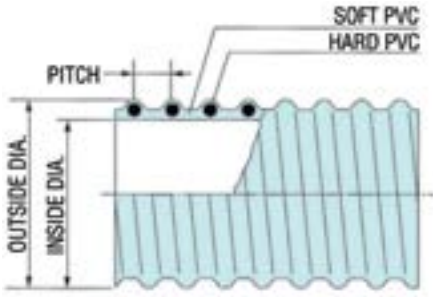

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: Heavy-duty PVC blower and ducting hose for collection of grass, leaves, dust, and fumes

Construction: Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

Note: Not a food-grade hose

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1-1/2	1.79	0.35	1.5	20	20.0	0.26	100
2	2.31	0.39	2.5	15	18.0	0.39	100
2-1/2	2.85	0.54	3.0	15	15.0	0.44	100
3	3.39	0.56	3.5	15	15.0	0.70	100
4	4.60	0.65	4.5	15	15.0	1.43	100
5	5.52	0.87	8.8	12	12.0	1.87	100
6	6.52	0.87	9.0	11	10.0	2.32	100
8	8.85	0.91	14.0	10	9.0	4.03	50



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**