


Kanalite FG (200 SFG)

Food grade suction and discharge hose

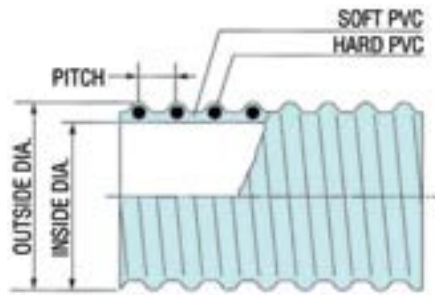

Suction & Discharge
Cold Weather/Flexible
Heavy-Duty
Abrasion Resistance
Petroleum
Food Grade
Duct
Specialty
Accessories

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: Food grade suction hose for use in canning, dairy and bottling

Construction: Produced entirely of compounds in compliance with FDA and 3-A non toxic specifications, flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

Note: Made with NSF51 approved materials

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1	1.25	0.30	1.5	50	29.8	0.18	100
1-1/4	1.52	0.33	2.0	45	29.8	0.22	100
1-1/2	1.81	0.35	2.5	45	29.8	0.35	100
2	2.36	0.39	4.0	40	29.8	0.50	100
2-1/2	2.87	0.56	4.5	35	29.8	0.68	100
3	3.50	0.59	6.0	35	29.8	1.00	100
4	4.63	0.65	8.0	30	29.8	1.52	100

45 mm	2.13	0.39	4.0	37	29.8	0.45	100
57 mm	2.60	0.43	4.5	35	29.8	0.60	100

Metric



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**