


# Water Suction



## T202AA Series 150 PSI EPDM General Purpose Water S & D Hose

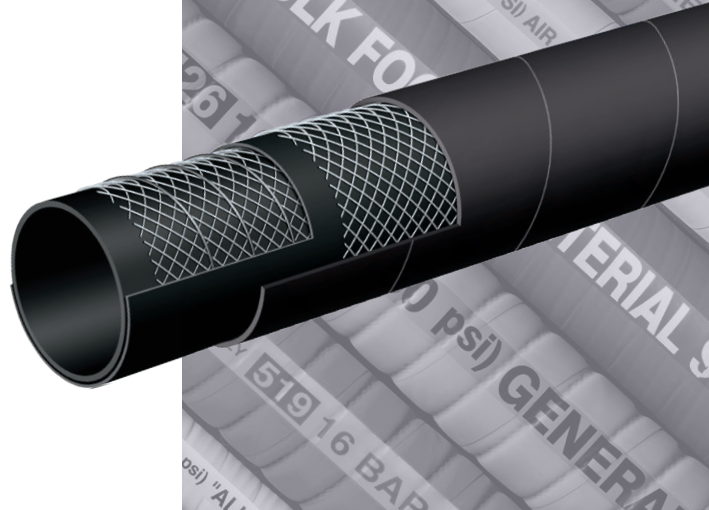

FOR APPLICATIONS INVOLVING INDUSTRIAL ACID CHEMICALS AND ALCOHOLS, PLEASE REFER TO T505OG AND T509OE CHEMICAL HOSES

### General Applications:

Suction and discharge of non-corrosive liquids for irrigation, construction, fertilizers and lasso acid solutions.

### Construction:

**Tube:** Black EPDM.

**Reinforcement:** Spiraled high tensile textile cords with flexible steel helix wire.

**Cover:** Black EPDM – abrasion and ozone resistant.

### Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

### Service Temperature Range:

-40°F (-40°C) to +212°F (+100°C)

### Branding:

ALFAGOMMA – ITALY – T202 10 BAR (150 PSI)  
GENERAL PURPOSE EPDM (in green letters)

## Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T202AA100	1	25	1.38	35	150	30	4	100	0.47
T202AA125	1 1/4	32	1.65	42	150	30	5	100	0.56
T202AA150	1 1/2	38	1.89	48	150	30	6	100	0.64
T202AA200	2	51	2.40	61	150	30	8	100	0.84
T202AA250	2 1/2	63	2.95	75	150	27	10	100	1.20
T202AA300	3	76	3.46	88	150	27	12	100	1.44
T202AA350	3 1/2	90	4.02	102	150	27	14	100	1.82
T202AA400	4	102	4.49	114	150	27	16	100	2.03
T202AA500	5	127	5.55	141	150	24	25	20/50/100	3.18
T202AA600	6	152	6.54	166	150	24	30	20/25/50/100	4.01
T202AA800	8	203	8.70	221	150	21	40	20/25	6.59
T202AA1000	10	254	10.71	272	150	18	50	20	9.03
T202AA1200	12	305	12.87	327	150	18	61	20	12.54

### COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.