

# INDUSTRIAL



## **SUBMARINE HOSE**

PART NUMBER	HOSE I.D.	HOSE O.D.	RATED W.P. (PSI)	MIN. BEND RADIUS (IN.)	SAFETY FACTOR (RATIO)	VACUUM (IN-HG)	WT. PER FT. (LBS)
	3	4.31	225	18	4:1	Full	5.51
4300 Series	4	5.39	225	24	4:1	Full	7.65
4600 Series	6	7.52	225	36	4:1	Full	11.88
4700 Series	8	9.72	225	48	4:1	Full	13.98
	10	12.12	225	60	4:1	Full	15.23

Tube: Nitrile (NBR) | Black | 1/8" | Petroleum service for aromatic content of 50%

Reinforcement: Multiple Plies of High Strength Textile Tire Cord and High Tensile Helix Wire.

Cover: Neoprene (CR) | Black | ¼" | Standard Resistance to Abrasion, Oil, Tearing, Salt Water & Sunlight

Temperature: -40° F to +180° F

Lengths: Max - 50 feet


Application: Used in marine service for loading and unloading petroleum products

Fittings: Swaged on Nipples with 150# RF Weld Neck Flanges

Construction (layers): black tube, breaker, 4 plies steel fabric (wire tire-cord), helix wire over black, rubber cushion layer, 2 plies of regular tire-cord, cover layer

ISO 9001:2015 CERTIFIED QUALITY SYSTEM API Q1  $9^{\text{TH}}$  EDITION CERTIFIED QUALITY MANAGEMENT SYSTEM



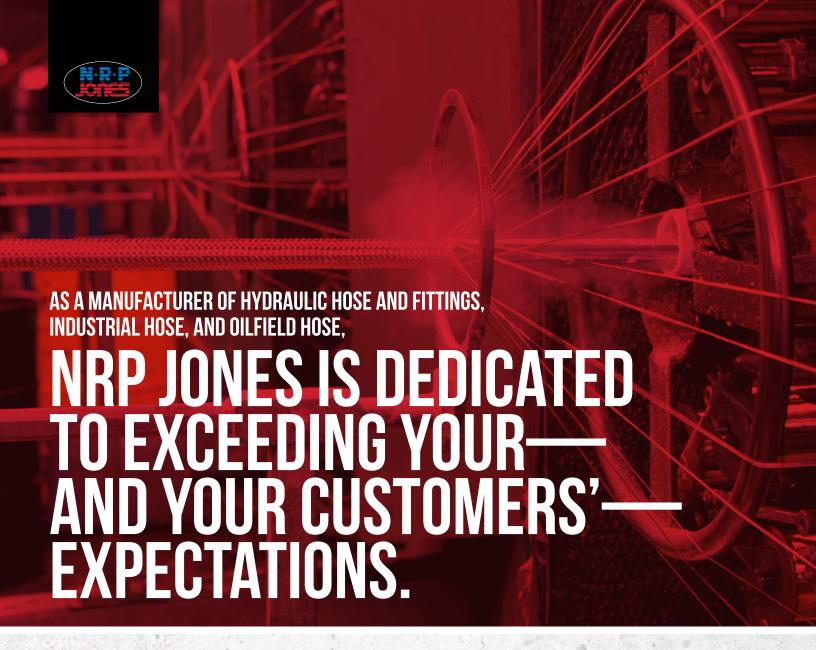

NRP Jones has what it takes to build your business. Over a half-century of experience helps you build customer satisfaction while increasing your sales and profits.

### **QUALITY**

Pride and craftsmanship result in the quality products that you require.

Product reliability will live up to your expectations.

NRP Jones ISO 9001:2015 Registered.

#### **SERVICE**

Select from a wide range of hose and fitting products.

Orders are shipped from a large inventory.

You can count on prompt, knowledgeable, friendly help every time you call.

Your business is taken personally.

#### VALUE

NRP Jones offers competitive pricing.

Distributor programs are available to increase your sales and margins.

We'll Go to Great Lengths to Meet Your Needs