























 NPTF Pipe	20120 B-142  Male - Rigid	 JIC 37°	20320 B-142  Male - Rigid	20620 B-143  Female - Swivel	23720 B-143  Female - Swivel 45° Elbow - Short
23920 B-144  Female - Swivel 90° Elbow - Short	24120 B-144  Female - Swivel 90° Elbow - Long	 SAE 45°	20420 B-144  Male - Rigid	20820 B-145  Female - Swivel	27720 B-145  Female - Swivel 45° Elbow
27920 B-145  Female - Swivel 90° Elbow	28120 B-146  Female - Swivel 90° Elbow - Long	 Flareless	21120 B-146  Male - Rigid	 Inverted Flare	22820 B-146  Male - Swivel
26720 B-146  Male - Swivel 45° Elbow	26920 B-147  Male - Swivel 90° Elbow	 PTT 30°	23220 B-147  Female - Swivel	 Compression	26120 B-147  Male (without Nut or Sleeve)
 Code 61 Flange	21520 B-147  Flange	21720 B-148  45° Elbow	21920 B-148  90° Elbow	 Seal-Lok® (O-Ring Face Seal)	2JS20 B-148  Female - Swivel Long
2J720 B-148  Female - Swivel 45° Elbow	2J920 B-149  Female - Swivel 90° Elbow - Short	2J120 B-149  Female - Swivel 90° Elbow - Long	 Assembly Instructions	20 Series Assembly Instructions	

20120


Male NPTF Pipe - Rigid



#									Additional Material Brass (B)
Part Number	Thread inch	Hose I.D. inch	A inch	mm	H inch	J inch	B inch	mm	
20120-2-4	1/8x27	3/16	1.72	44	7/16	5/8	0.94	24	
20120-2-5	1/8x27	1/4	1.82	46	1/2	11/16	0.99	25	
20120-4-4	1/4x18	3/16	1.93	49	9/16	5/8	1.15	29	
20120-4-5	1/4x18	1/4	2.01	51	9/16	11/16	1.18	30	
20120-4-6	1/4x18	5/16	2.11	54	9/16	13/16	1.19	30	
20120-6-6	3/8x18	5/16	2.20	56	3/4	13/16	1.28	33	
20120-6-8	3/8x18	13/32	2.48	63	3/4	15/16	1.39	35	
20120-8-8	1/2x14	13/32	2.73	69	7/8	15/16	1.64	42	
20120-8-10	1/2x14	1/2	2.88	73	7/8	1-1/8	1.66	42	
20120-12-10	3/4x14	1/2	2.95	75	1-1/16	1-1/8	1.73	44	
20120-12-12	3/4x14	5/8	3.25	83	1-1/16	1-1/4	1.75	44	
20120-12-16	3/4x14	7/8	2.81	71	1-3/8	1-7/16	1.62	41	
20120-16-16	1x11-1/2	7/8	2.99	76	1-3/8	1-7/16	1.80	46	
20120-20-20	1-1/4x11-1/2	1-1/8	3.24	82	1-3/4	1-3/4	1.96	50	●
20120-24-24	1-1/2x11-1/2	1-3/8	3.50	89	2	2	2.13	54	●
20120-32-32	2 x11-1/2	1-13/16	4.05	103	2-1/2	2-1/2	2.31	59	●

20320

Male JIC 37° - Rigid




#				A				B	
Part Number	Thread inch		Hose I.D. inch	inch	mm	inch	inch	inch	mm
20320-4-4	1/4	7/16x20	3/16	1.83	46	1/2	5/8	1.05	27
20320-5-5	5/16	1/2x20	1/4	1.94	49	9/16	11/16	1.11	28
20320-6-6	3/8	9/16x18	5/16	2.11	54	5/8	13/16	1.19	30
20320-8-8	1/2	3/4x16	13/32	2.57	65	13/16	15/16	1.48	38
20320-10-10	5/8	7/8x14	1/2	2.88	73	15/16	1-1/8	1.66	42
20320-12-12	3/4	1-1/16x12	5/8	3.35	85	1-1/8	1-1/4	1.85	47
20320-16-16	1	1-5/16x12	7/8	2.95	75	1-3/8	1-7/16	1.76	45

20620

Female JIC 37° - Swivel


# Part Number	Thread inch	Hose I.D. inch	A inch mm	H inch	J inch	W inch	B inch mm	Additional Material Stainless Steel (C)
20620-4-4	1/4 7/16x20	3/16	1.94 49	9/16	5/8	9/16	1.16 29	•
20620-4-5	1/4 7/16x20	1/4	2.04 52	9/16	11/16	9/16	1.21 31	
20620-5-5	5/16 1/2x20	1/4	2.12 54	5/8	11/16	5/8	1.29 33	
20620-6-5	3/8 9/16x18	1/4	2.19 56	11/16	11/16	11/16	1.36 35	
20620-6-6	3/8 9/16x18	5/16	2.32 59	11/16	13/16	11/16	1.40 36	•
20620-8-6	1/2 3/4x16	5/16	2.44 62	7/8	13/16	7/8	1.52 39	
20620-8-8	1/2 3/4x16	13/32	2.79 71	7/8	15/16	7/8	1.70 43	•
20620-8-10	1/2 3/4x16	1/2	2.99 76	7/8	1-1/8	7/8	1.77 45	
20620-10-8	5/8 7/8x14	13/32	2.94 75	7/8	15/16	1	1.85 47	
20620-10-10	5/8 7/8x14	1/2	3.10 79	1	1-1/8	1	1.88 48	•
20620-10-12	5/8 7/8x14	5/8	3.40 86	1	1-1/4	1	1.90 48	
20620-12-12	3/4 1-1/16x12	5/8	3.49 89	1-1/4	1-1/4	1-1/4	1.99 51	•
20620-16-16	1 1-5/16x12	7/8	3.20 81	1-1/2	1-7/16	1-1/2	2.01 51	•
20620-20-20	1-1/4 1-5/8x12	1-1/8	3.56 90	2	1-3/4	2	2.28 58	
20620-24-24	1-1/2 1-7/8x12	1-3/8	3.95 100	2-1/4	2	2-1/4	2.58 66	
20620-32-32	2 2-1/2x12	1-13/16	4.71 120	2-7/8	2-1/2	2-7/8	2.97 75	



23720


Female JIC 37° - Swivel - 45° Elbow - Short Drop

# Part Number	Thread inch	Hose I.D. inch	A inch mm	E inch mm	H inch	J inch	W inch	B inch mm
23720-4-4	1/4 7/16x20	3/16	2.08 53	0.33 8	3/8	5/8	9/16	1.30 33
23720-5-5	5/16 1/2x20	1/4	2.30 58	0.36 9	7/16	11/16	5/8	1.47 37
23720-6-6	3/8 9/16x18	5/16	2.45 62	0.39 10	1/2	13/16	11/16	1.53 39
23720-8-6	1/2 3/4x16	5/16	2.77 70	0.55 14	5/8	13/16	7/8	1.85 47
23720-10-10	5/8 7/8x14	1/2	3.36 85	0.65 17	3/4	1-1/8	1	2.14 54
23720-12-12	3/4 1-1/16x12	5/8	3.94 100	0.79 20	7/8	1-1/4	1-1/4	2.44 62
23720-16-16	1 1-5/16x12	7/8	3.73 95	0.90 23	1-1/8	1-7/16	1-1/2	2.54 65
23720-20-20	1-1/4 1-5/8x12	1-1/8	4.17 106	1.19 30	1-1/2	1-3/4	2	2.89 73



23920


Female JIC 37° - Swivel - 90° Elbow - Short Drop



#												
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	inch	inch	mm	
23920-4-4	1/4	7/16x20	3/16	1.91	49	0.83	21	3/8	5/8	9/16	1.13	29
23920-5-5	5/16	1/2x20	1/4	2.30	58	0.77	20	7/16	11/16	5/8	1.47	37
23920-6-6	3/8	9/16x18	5/16	2.35	60	0.90	23	1/2	13/16	11/16	1.43	36
23920-8-8	1/2	3/4x16	13/32	2.88	73	1.09	28	5/8	15/16	7/8	1.79	45
23920-10-10	5/8	7/8x14	1/2	3.20	81	1.24	31	3/4	1-1/8	1	1.98	50
23920-12-12	3/4	1-1/16x12	5/8	3.86	98	1.82	46	7/8	1-1/4	1-1/4	2.36	60
23920-16-16	1	1-5/16x12	7/8	3.69	94	2.14	54	1-1/8	1-7/16	1-1/2	2.50	64
23920-20-20	1-1/4	1-5/8x12	1-1/8	4.01	102	2.59	66	1-1/2	1-3/4	2	2.73	69
23920-24-24	1-1/2	1-7/8x12	1-3/8	4.43	113	2.82	72	1-3/4	2	2-1/4	3.06	78

24120


Female JIC 37° - Swivel - 90° Elbow - Long Drop



#												
Part Number	Thread		Hose I.D.	A		E		H	J	W	B	
	inch		inch	inch	mm	inch	mm	inch	inch	inch	inch	mm
24120-4-4	1/4	7/16x20	3/16	2.08	53	1.80	46	3/8	5/8	9/16	1.30	33
24120-6-6	3/8	9/16x18	5/16	2.34	59	2.18	55	1/2	13/16	11/16	1.42	36
24120-8-8	1/2	3/4x16	13/32	2.95	75	2.43	62	5/8	15/16	7/8	1.86	47
24120-10-10	5/8	7/8x14	1/2	3.26	83	2.58	66	3/4	1-1/8	1	2.04	52
24120-12-12	3/4	1-1/16x12	5/8	3.78	96	3.74	95	7/8	1-1/4	1-1/4	2.28	58

20420

Male SAE 45° - Rigid




#									
Part Number	Thread	Hose I.D.	A		H	J	B		
	inch	inch	inch	mm	inch	inch	inch	mm	
20420-4-4	1/4	7/16x20	3/16	1.80	46	1/2	5/8	1.02	26
20420-5-5	5/16	1/2x20	1/4	1.94	49	9/16	11/16	1.11	28
20420-6-6	3/8	5/8x18	5/16	2.17	55	11/16	13/16	1.25	32
20420-8-8	1/2	3/4x16	13/32	2.67	68	13/16	15/16	1.58	40
20420-10-10	5/8	7/8x14	1/2	3.00	76	15/16	1-1/8	1.78	45
20420-12-12	3/4	1-1/16x14	5/8	3.50	89	1-1/8	1-1/4	2.00	51

20820

Female SAE 45° - Swivel


#				A		H	J	W	B	
Part Number	Thread	Hose I.D.		inch	mm	inch	inch	inch	inch	mm
20820-4-4	1/4	7/16x20	3/16	1.94	49	9/16	5/8	9/16	1.16	29
20820-4-5	1/4	7/16x20	1/4	2.04	52	9/16	11-16	9/16	1.21	31
20820-5-5	5/16	1/2x20	1/4	2.12	54	5/8	11-16	5/8	1.29	33
20820-6-6	3/8	5/8x18	5/16	2.36	60	3/4	13/16	3/4	1.44	37
20820-8-8	1/2	3/4x16	3/8	2.79	71	7/8	15/16	7/8	1.70	43
20820-8-10	1/2	3/4x16	1/2	2.99	76	7/8	1-1/8	7/8	1.77	45
20820-10-10	5/8	7/8x14	1/2	3.10	79	1	1-1/8	1	1.88	48
20820-12-12	3/4	1-1/16x14	5/8	3.49	89	1-1/4	1-1/4	1-1/4	1.99	51



27720

Female SAE 45° - Swivel - 45° Elbow


#			A		E		H	J	W	B	
Part Number	Thread	Hose I.D.	inch	mm	inch	mm	inch	inch	inch	inch	mm
27720-6-6	3/8	5/8x18	2.45	62	0.39	10	1/2	13/16	3/4	1.53	39
27720-8-6	1/2	3/4x16	2.77	71	0.55	14	5/8	13/16	7/8	1.86	47
27720-8-8	1/2	3/4x16	3.09	78	0.55	14	5/8	15/16	7/8	2.00	51
27720-10-10	5/8	7/8x14	3.35	85	0.65	17	3/4	1-1/8	1	2.13	54



27920

Female SAE 45° - Swivel - 90° Elbow


#			A		E		H	J	W	B	
Part Number	Thread	Hose I.D.	inch	mm	inch	mm	inch	inch	inch	inch	mm
27920-4-4	1/4	7/16x20	1.91	49	0.83	21	3/8	5/8	9/16	1.13	29
27920-5-5	5/16	1/2x20	2.30	58	0.77	20	7/16	11/16	5/8	1.47	37
27920-6-6	3/8	5/8x18	2.33	59	0.85	22	1/2	13/16	3/4	1.41	36
27920-8-8	1/2	3/4x16	2.86	73	1.09	28	5/8	15/16	7/8	1.77	45
27920-10-10	5/8	7/8x14	3.20	81	1.24	31	3/4	1-1/8	1	1.98	50
27920-12-12	3/4	1-1/16x14	3.87	98	1.82	46	7/8	1-1/4	1-1/4	2.37	60



Notch in nut signifies 45° flare.

28120

Female SAE 45° - Swivel - 90° Elbow - Long Drop




#										
Part Number	Thread	Hose I.D.	A		E		H	J	W	B
	inch	inch	inch	mm	inch	mm	inch	inch	inch	mm
28120-6-6	3/8 5/8x18	5/16	2.34	59	2.18	55	1/2	13/16	3/4	1.42 36
28120-8-8	1/2 3/4x16	13/32	2.95	75	2.43	62	5/8	15/16	7/8	1.86 47

Notch in nut signifies 45° flare.

21120

Male Ferulok Flareless - Rigid (24° Cone with Nut and Ferrule)




#			A					B	
Part Number	Thread inch	Hose I.D. inch	inch	mm	inch	inch	inch	inch	mm
21120-6-6	3/8 9/16x18	5/16	2.05	52	5/8	13/16	11/16	1.13	29
21120-8-8	1/2 3/4x16	13/32	2.52	64	13/16	15/16	7/8	1.43	36

The Parker Ferrule-Fix fitting makes it possible to salvage the bent tube section from a hose assembly for quick, easy on the job repairs. For additional information see Ferrule-Fix installation instructions in the Technical Section.

22820


Male Inverted SAE 45° - Swivel



#										
Part Number	Thread		Hose I.D.	A		H	J	W	B	
	inch		inch	inch	mm	inch	inch	inch	inch	mm
22820-4-4	1/4	7/16x24	3/16	2.45	62	3/8	5/8	7/16	1.67	42
22820-5-5	5/16	1/2x20	1/4	2.70	69	7/16	11/16	1/2	1.87	47
22820-6-6	3/8	5/8x18	5/16	2.95	75	1/2	13/16	5/8	2.03	52
22820-8-8	1/2	3/4x18	13/32	3.36	85	5/8	15/16	3/4	2.27	58
22820-10-10	5/8	7/8x18	1/2	3.64	92	3/4	1-1/8	7/8	2.42	61

26720

Male Inverted SAE 45° - Swivel - 45° Elbow




#										
Part Number	Thread	Hose I.D.	A		E		H	J	W	B
	inch	inch	inch	mm	inch	mm	inch	inch	inch	mm
26720-4-4	1/4 7/16x24	3/16	2.21	56	0.62	16	3/8	5/8	7/16	1.43 36
26720-5-5	5/16 1/2x20	1/4	2.44	62	0.70	18	7/16	11/16	1/2	1.61 41
26720-6-6	3/8 5/8x18	5/16	3.00	76	0.94	24	1/2	13/16	5/8	2.08 53
26720-8-8	1/2 3/4x18	13/32	3.51	89	1.09	28	5/8	15/16	3/4	2.42 61

26920

Male Inverted SAE 45° - Swivel - 90° Elbow


#				A		E		H	J	W	B	
Part Number	Thread	Hose I.D.		inch	mm	inch	mm	inch	inch	inch	inch	mm
26920-4-4	1/4	7/16x24	3/16	2.29	58	1.56	40	3/8	5/8	7/16	1.51	38
26920-5-5	5/16	1/2x20	1/4	2.55	65	1.65	42	7/16	11/16	1/2	1.72	44
26920-5-6	5/16	1/2x20	5/16	2.63	67	1.65	42	1/2	13/16	1/2	1.71	43
26920-6-6	3/8	5/8x18	5/16	2.67	68	1.69	43	1/2	13/16	5/8	1.75	44
26920-8-8	1/2	3/4x18	13/32	3.09	78	1.88	48	5/8	15/16	3/4	2.00	51



23220

Female PTT 30° - Swivel


#				A		H	J	W	B	
Part Number	Thread	Hose I.D.		inch	mm	inch	inch	inch	inch	mm
23220-16-16	1	1-5/16x14	7/8	2.98	76	1-1/2	1-7/16	1-1/2	1.79	45



26120

Male SAE Compression Seat (without Nut or Sleeve)

#				A		H	J	B	
Part Number	Thread	Hose I.D.		inch	mm	inch	inch	inch	mm
26120-10-10	5/8	13/16x18	1/2	2.64	67	7/8	1-1/8	1.42	36




21520

SAE Code 61 Flange Head ISO 12151-3-S-L

#			A		F	H	J	B	
Part Number	Flange	Hose I.D.	inch	mm	inch	inch	inch	inch	mm
21520-20-20	1-1/4	1-1/8	3.58	91	2	1-1/2	1-3/4	2.30	58
21520-40-40	2-1/2	2-3/8	5.22	133	3-5/16	2-3/4	3-1/8	3.41	87


See Accessories Section for O-Rings and Flange Kits.



21720

SAE Code 61 Flange Head - 45° Elbow

ISO 12151-3- E45S - L (1 Piece: ISO 12151-3- E45M - L)




#			A		E					B	
Part Number	Flange inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	inch	inch	mm
21720-20-20	1-1/4	1-1/8	4.10	104	1.12	28	2	1-1/2	1-3/4	2.82	72
21720-40-40	2-1/2	2-3/8	5.83	148	1.41	36	3-3/8	2-3/4	3-1/8	4.02	102

21920

SAE Code 61 Flange Head - 90° Elbow

ISO 12151-3- E90S - L (1 Piece: ISO 12151-3- E90M - L)




#			A		E					B	
Part Number	Flange inch	Hose I.D. inch	inch	mm	inch	mm	inch	inch	inch	inch	mm
21920-8-8	1/2	13/32	2.95	75	1.62	41	1-3/16	5/8	15/16	1.86	47
21920-32-32	2	1-13/16	5.44	138	3.19	81	2-13/16	2-1/4	2-1/2	3.70	94
21920-40-40	2-1/2	2-3/8	6.18	157	3.75	95	3-5/16	2-3/4	3-1/8	4.37	111

2JS20

Female Seal-Lok® - Swivel - Long

ISO 12151-1 - SWSB




#				A					B	
Part Number	Thread	inch	Hose I.D.	inch	mm	H	J	W	inch	mm
2JS20-4-4	1/4	9/16x18	3/16	2.07	53	9/16	5/8	11/16	1.29	33
2JS20-6-6	3/8	11/16x16	5/16	2.36	60	1/2	13/16	13/16	1.44	37
2JS20-8-8	1/2	13/16x16	13/32	2.92	74	5/8	15/16	15/16	1.83	46
2JS20-10-10	5/8	1x14	1/2	3.15	80	3/4	1-1/8	1-1/8	1.93	49
2JS20-12-12	3/4	1-3/16x12	5/8	3.66	93	1-1/8	1-1/4	1-3/8	2.16	55

2J720

Female Seal-Lok® - Swivel - 45° Elbow

ISO 12151-1 - SWE45




#												
Part Number	Thread		Hose I.D.	A	E			H	J	W	B	
	inch		inch	inch	mm	inch	mm	inch	inch	inch	inch	mm
2J720-4-4	1/4	9/16x18	3/16	2.24	57	0.41	10	7/16	5/8	11/16	1.46	37
2J720-6-6	3/8	11/16x16	5/16	2.52	64	0.43	11	1/2	13/16	13/16	1.60	41
2J720-8-8	1/2	13/16x16	13/32	3.19	81	0.59	15	5/8	15/16	15/16	2.10	53
2J720-10-10	5/8	1x14	1/2	3.46	88	0.65	17	3/4	1-1/8	1-1/8	2.24	57

See Accessories Section for O-Rings and Flange Kits.

2J920

Female Seal-Lok® - Swivel 90° Elbow - Short Drop
 ISO 12151-1 - SWE90


# Part Number	Thread		Hose I.D. inch	A		E		H	J	W	B	
	inch			inch	mm	inch	mm	inch	inch	inch	inch	mm
2J920-4-4	1/4	9/16x18	3/16	2.22	56	0.82	21	7/16	5/8	11/16	1.44	37
2J920-6-6	3/8	11/16x16	5/16	2.39	61	0.90	23	1/2	13/16	13/16	1.47	37
2J920-8-8	1/2	13/16x16	13/32	2.91	74	1.15	29	5/8	15/16	15/16	1.82	46
2J920-10-10	5/8	1x14	1/2	3.16	80	1.27	32	3/4	1-1/8	1-1/8	1.94	49
2J920-12-12	3/4	1-3/16x12	5/8	3.74	95	1.85	47	7/8	1-1/4	1-3/8	2.24	57



2J120

Female Seal-Lok® - Swivel - 90° Elbow - Long Drop
 ISO 12151-1 - SWEL90


# Part Number	Thread		Hose I.D. inch	A		E		H	J	W	B	
	inch			inch	mm	inch	mm	inch	inch	inch	inch	mm
2J120-4-4	1/4	9/16x18	3/16	2.01	51	1.80	46	7/16	5/8	11/16	1.23	31
2J120-6-6	3/8	11/16x16	5/16	2.48	63	2.13	54	1/2	13/16	13/16	1.56	40
2J120-8-8	1/2	13/16x16	13/32	2.96	75	2.51	64	5/8	15/16	15/16	1.87	47



See Accessories Section for O-Rings.


20 Series Hose Assembly Instructions

A

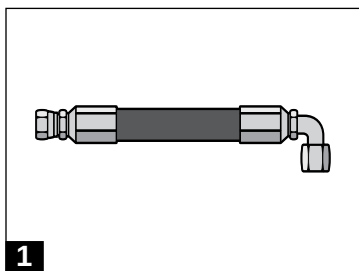


1. Identify over all length (OAL) of hose assembly and the cut off allowance (COA) length of fitting(s) on hose ends by use of the fitting data table. Properly measure, mark and cut hose to desired length using fine tooth hacksaw or cutoff machine. Care should be taken to ensure a square, clean cut is obtained.

B

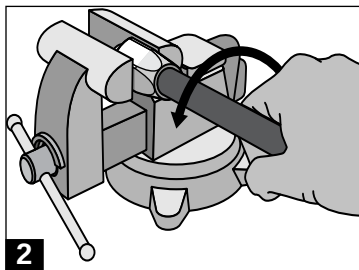


2. Air or solvent flush cut end of hose as necessary to produce a clean hose ID prior to assembly. Place socket in vice and screw in hose counter clockwise until hose bottoms. Back hose out 1/2 turn.

C

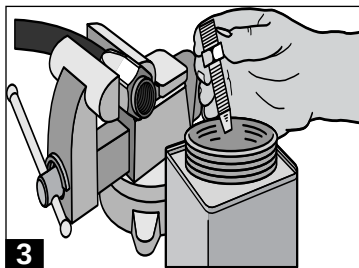

3. Oil inside of hose and nipple threads liberally with Hoze-Oil. (See Section C). Do not oil hose cover.

D

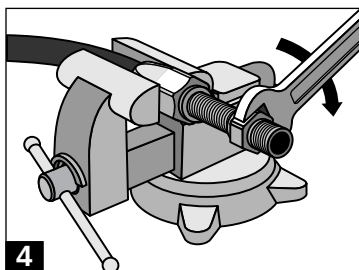

4. Screw nipple assembly into socket using a wrench on the nipple hex until the nipple hex shoulders against the socket. A 1/32" to 1/16" gap between the nipple hex and socket is allowed for displacement angle adjustment when two elbow fittings are used.

Inspection. Examine hose assembly internally for cut or bulged tube, obstructions and cleanliness. Clean ID of hose as necessary. Swivel nuts should turn freely. Check the layline of the hose to be sure the assembly is not twisted. Cap the ends of the assembly to keep clean.

Special Instructions for stainless steel fittings. When assembling fittings made with 316 stainless steel, lubricate the threads of both the socket and nipple with Accrolube High Efficiency Lubricant (see Section C) or equivalent metal assembly lubricant.

Note: DISASSEMBLE IN REVERSE ORDER

IF YOU HAVE QUESTIONS CONCERNING THE PRODUCTS
OR APPLICATION OF THE PRODUCTS CONTAINED IN THIS
CATALOG, PLEASE CALL: PARKER HOSE PRODUCTS
DIVISION - TECHNICAL SERVICES DEPARTMENT

PHONE: 440/943-5700

FAX: 440/943-3129

<http://www.parkerhose.com>