

92 Series Visual Index

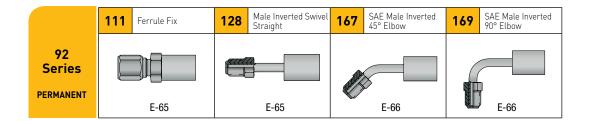

11192 Ferrule-Fix (Nut and Sleeve Included)



Part Number	Thread Size	Hose Size		A	4	Cutoff E	Allow.	H Hex	J Hex
#	<u>~~~~~</u>	0						\bigcirc	\bigcirc
		inch	mm	inch	mm	inch	mm	inch	inch
11192-3-3	3/8-24	3/16	5	1.37	35	15/16	24	5/8	7/16

Construction: Steel.


Add "C" for Stainless Steel.

"Ferrul-Fix" affords salvaging of bent tube section of combination tube-hose assemblies and quick, easy repair on the job. See page G-29 for Ferrule-Fix installation instructions.

NOTE: Nut Part Number is 111-size. Sleeve Part Number is 110-size.

Nuts and Ferrules are Manufactured by the Instrumentation Products Division. Refer to Catalog 4230/4233 for additional information.


12892 SAE Male Inverted Swivel Straight



Part Number	Thread Size	Hose Size		А		Cutoff Allow. B		С		J Hex
#	<u>~~~~~</u>	0								\bigcirc
		inch	mm	inch	mm	inch	mm	inch	mm	inch
12892-3-3C	3/8-24	3/16	5	2.01	55	1-1/2	38	1.25	32	7/16

Construction: Stainless Steel.


16792 SAE Male Inverted Swivel 45° Elbow



Part Number	Thread Size	Hose Size		A		Cutoff Allow. B		E		J Hex
#	<u>~~~~~</u>	0								\bigcirc
		inch	mm	inch	mm	inch	mm	inch	mm	inch
16792-3-3C	3/8-24	3/16	5	2.36	60	1-15/16	50	0.62	16	3/8

Construction: Stainless Steel.

16992 SAE Male Inverted Swivel 90° Elbow



Part Number	Thread Size	Hose Size		A		Cutoff Allow. B		E		J Hex
#	~~~~	0								\bigcirc
		inch	mm	inch	mm	inch	mm	inch	mm	inch
16992-3-3C	3/8-24	3/16	5	1.45	37	1	25	1.25	32	3/8

Construction: Stainless Steel.

